

# Harness

## Technical Specifications

**Product:** MA08

**Reference:** 1002853 – Size Medium / Large  
1002854 – Size Small

### Main Features

*Webbing*

***Shoulder straps:***

DuraFlex™ black webbing with green and orange straps

Width: 45 mm

Raw material: 100% Polyamide

Breaking strength: > 2200 daN

***Back strap:***

Black webbing printed "MILLER"

Width: 45 mm

Raw material: 100% Polyester

***Buttock straps:***

Green elastic webbing

Width: 45 mm

Raw material: 100% Polyamide

Breaking strength: > 2200 daN

***Front strap:***

Black webbing

Width: 44 mm

Raw material: 100% Polyester

Breaking strength: > 2500 daN

### *Fittings*

***Rear & Front D-ring:***

Raw material: 7 mm Stainless steel

Breaking strength: > 5000 daN

***Adjustment buckles:***

Raw material: 45 mm Aluminium alloy

Breaking strength: > 850 daN

### *Weight*

MA08: 1.270 kg

MA09: 1.219 kg


### Tests

Breaking strength: > 15 kN

Temperature: -30°C to +50°C

### Standards

**EN 361: FULL BODY HARNESSSES**

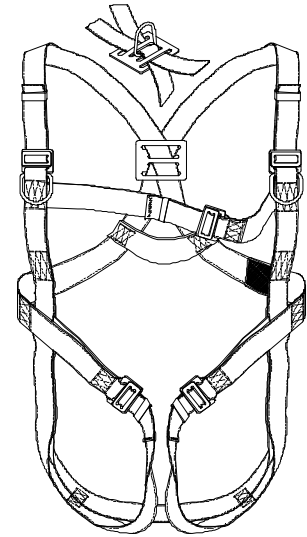



### Technical specifications and standard

**European directive :**  
89/686/CEE

**Norms :**  
EN361

**EC type attestation :**  
0082/490/160/08/00/0257

**Quality Assurance**  
AFAQ: ISO 9001 : Version 2000

**Certification number :**  
0333 AFAQ/CTH

**Marking :**  
MILLER



click address to go to...

## DURAFLEX HARNESS 3PT MA08 - SIZE M/L

### Product use

**3-point - Fall arrest full body harness, rear & front anchorage(2 sternal D-Rings) for use with lanyard or fall arrester. With Teflon finish.**

### Technical description

10 028 53 - M/L size  
10 028 54 - S size  
10 028 59 - XL size

Duraflex Shoulder & legs straps  
Sternal & Rear anchorage point  
Adjustable shoulder and legs straps  
Light weight quick fastening buckles  
Sub-pelvic strap

#### Webbing

Shoulder & legs straps  
Duraflex stretchable 45 mm webbing  
Polyamide & elastomer  
Breaking strength: > 2200 daN

#### D-rings :

Raw material: Ø7 mm Stainless steel  
Breaking strength: > 5000 daN

#### Adjustment buckles:

Raw material: 45 mm Aluminium alloy  
Breaking strength: > 850 daN

**Weight :** approx. : 1.3 kg

**Breaking strength:** > 15 KN

Temperature: -30°C to +50°C

### Additional information

DuraFlex® webbing is designed to stretch and conform to the worker's body. Elasticated webbing has been patented in Europe. Patent no: EP-B-0902710 in US : Patent no: 6.006.200. All Miller harnesses are CE certified and comply with EN 361 and, where necessary, with EN 358.

# DURAFLEX HARNESS 3PT MA08 - SIZE M/L

The supplier or its legal representative supplier settled in the European community :

**MILLER**

declares that the new Individual Protection Equipment described hereafter :

Designation :

**DuraFlex Harness 3pt MA08 - Size M/L**

Article code :

**10 028 53**

is in conformity with Directive dispositions 89/686/CEE.

This PPE has been the object of the EC attestation type :

**0082/490/160/08/00/0257**

delivered by :

**APAVE Lyonnaise  
177 route de Saint-Bel  
69811  
TASSIN CEDEX  
France**

Identified by the number :

**0082**

Made on the : **05/08/2004**

at : **Vierzon**

Division : **Fall Protection**

By : **Frederic GUICHARD**

[click address to go to...](#)



### Technical specifications and standard

**European directive :**  
89/686/CEE

**Norms :**  
EN361

**EC type attestation :**  
0082/490/160/08/00/0257

**Quality Assurance**  
AFAQ: ISO 9001 : Version 2000

**Certification number :**  
0333 AFAQ/CTH

**Marking :**  
MILLER



click address to go to...

# DURAFLEX HARNESS 3PT MA08 - SIZE XL

## Product use

3-point - Fall arrest full body harness, rear & front anchorage(2 sternal D-Rings) for use with lanyard or fall arrester. With Teflon finish.

## Technical description

10 028 53 - M/L size  
10 028 54 - S size  
10 028 59 - XL size

Duraflex Shoulder & legs straps  
Sternal & Rear anchorage point  
Adjustable shoulder and legs straps  
Light weight quick fastening buckles  
Sub-pelvic strap

### Webbing

Shoulder & legs straps  
Duraflex stretchable 45 mm webbing  
Polyamide & elastomer  
Breaking strength: > 2200 daN

### D-rings :

Raw material: Ø7 mm Stainless steel  
Breaking strength: > 5000 daN

### Adjustment buckles:

Raw material: 45 mm Aluminium alloy  
Breaking strength: > 850 daN

**Weight :** approx. : 1.3 kg

**Breaking strength:** > 15 KN

Temperature: -30°C to +50°C

## Additional information

DuraFlex® webbing is designed to stretch and conform to the worker's body. Elasticated webbing has been patented in Europe. Patent no: EP-B-0902710 in US : Patent no: 6.006.200. All Miller harnesses are CE certified and comply with EN 361 and, where necessary, with EN 358.

# DURAFLEX HARNESS 3PT MA08 - SIZE XL

The supplier or its legal representative supplier settled in the European community :

**MILLER**

declares that the new Individual Protection Equipment described hereafter :

Designation :

**DuraFlex Harness 3pt MA08 - Size XL**

Article code :

**10 028 59**

is in conformity with Directive dispositions 89/686/CEE.

This PPE has been the object of the EC attestation type :

**0082/490/160/08/00/0257**

delivered by :

**APAVE Lyonnaise  
177 route de Saint-Bel  
69811  
TASSIN CEDEX  
France**

Identified by the number :

**0082**

Made on the : **05/08/2004**

at : **Vierzon**

Division : **Fall Protection**

By : **Frederic GUICHARD**

[click address to go to...](#)



### Technical specifications and standard

**European directive :**  
89/686/CEE

**Norms :**  
EN361

**EC type attestation :**  
0082/490/160/08/00/0257

**Quality Assurance**  
AFAQ: ISO 9001 : Version 2000

**Certification number :**  
0333 AFAQ/CTH

**Marking :**  
MILLER



## TECHNICAL FORM

# DURAFLEX HARNESS 3PT MA08 - SIZE XL

## Product use

3-point - Fall arrest full body harness, rear & front anchorage(2 sternal D-Rings) for use with lanyard or fall arrester. With Teflon finish.

## Technical description

Duraflex Shoulder & legs straps  
Sternal & Rear anchorage point  
Adjustable shoulder and legs straps  
Light weight quick fastening buckles  
Sub-pelvic strap

### Webbing

Shoulder & legs straps  
Duraflex stretchable 45 mm webbing  
Polyamide & elastomer  
Breaking strength: > 2200 daN

### D-rings :

Raw material: Ø7 mm Stainless steel  
Breaking strength: > 5000 daN

### Adjustment buckles:

Raw material: 45 mm Aluminium alloy  
Breaking strength: > 850 daN

**Weight :** approx. : 1.3 kg

**Breaking strength:** > 15 KN

**Temperature:** -30°C to +50°C

## Additional information

DuraFlex® webbing is designed to stretch and conform to the worker's body. Elasticated webbing has been patented in Europe. Patent no: EP-B-0902710 in US : Patent no: 6.006.200. All Miller harnesses are CE certified and comply with EN 361 and, where necessary, with EN 358.