



MINILITE KIT (KIT 9)

Product use

Miller Minilite™ 3.3m self-retracting fall limiter with scaffold hook.

Miller DuraFlex® 1-point elasticated harness with TEFLON® finish.

Includes free plastic carry case.

Technical description

MI 11 - Minilite retractable fall arrest block

Lifeline material

Minilite w/swivel, scaf hook and snap hook
Length : 3.30 m,
Weight : 1.7 kg

Materials

Housing : Thermoplastic Cover
Webbing : Polyester

Mechanism : Stainless steel

Automatic snap hook :
Raw material: chromate steel
Standard: EN 362
Opening : 20 mm
Breaking strength: > 2000 daN

Automatic snap hook :

Raw material: White chromate steel
Standard: EN 362
Opening : 50 mm
Breaking strength: > 2000 daN

Technical

Breaking strength: > 15 kN
Braking force : < 6 kN
Arrest distance : <2m
Temperature: -30°C to +50°C
Max working load : 136 kg

MA02 - 1 point Miller Duraflex harness, rear anchorage

Shoulder & legs straps:
Duraflex stretchable 45 mm webbing
Polyamide & elastomer
Breaking strength: > 2200 daN

D-ring

Technical specifications and standard

European directive :

Norms :

EC type attestation :

Quality Assurance

Certification number :

Marking :

[click address to go to....](#)

MINILITE KIT (KIT 9)

Raw material: Ø7 mm Stainless steel
Breaking strength: > 5000 daN

Adjustment buckles
Raw material: 45 mm Aluminium alloy
Breaking strength: > 850 daN

Small plastic carry case 325 x 110 x 300

Additional information

DuraFlex® webbing is designed to stretch and conform to the worker's body. Elasticated webbing has been patented in Europe. Patent no: EP-B-0902710 in US : Patent no: 6.006.200. All Miller harnesses are CE certified and comply with EN 361 and, where necessary, with EN 358.

[click address to go to....](#)

MINILITE KIT (KIT 9)

The supplier or its legal representative supplier settled in the European community :

MILLER

declares that the new Individual Protection Equipment described hereafter :

Designation :

Minilite Kit (Kit 9)

Article code :

10 061 03

is in conformity with Directive dispositions .

This PPE has been the object of the EC attestation type :

delivered by :

Made on the :

at :

Division : **Fall Protection**

By :

[click address to go to....](#)

Fall Arrest Block

Technical Specifications

Product: MT 13 - Minilite / Duraflex construction kit

Content : MI 11 - Minilite retractable fall arrest block

Reference	Lifeline material	Length	Weight
1006103	Minilite w/swivel, scaf hook and snap hook	3.30 m	1.7 kg

Materials


Housing : Thermoplastic Cover
Webbing : Polyester
Mechanism : Stainless steel
Automatic snap hook :
Raw material: chromate steel
Standard: EN 362
Opening : 20 mm
Breaking strength: > 2000 daN

Accessories

Automatic snaf hook :
Raw material: White chromate steel
Standard: EN 362
Opening : 50 mm
Breaking strength: > 2000 daN

Technical

Breaking strength: > 15 kN
Braking force : < 6 kN
Arrest distance : < 2m
Temperature: -30°C to +50°C
Max working load : 136 kg

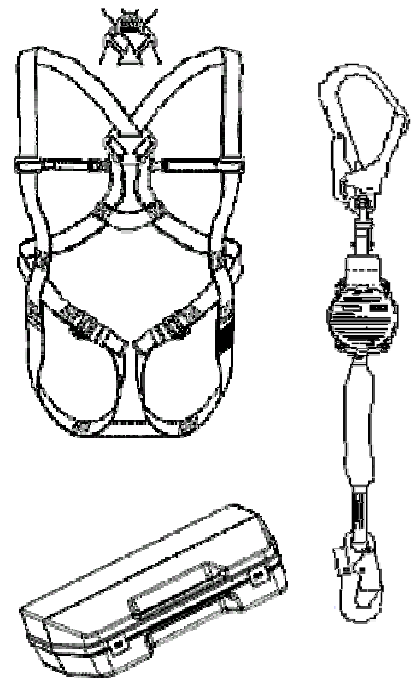

MA02 – 1 point Miller™ Duraflex™ harness, rear anchorage

Shoulder & legs straps:
Duraflex™ stretchable 45 mm webbing
Polyamide & elastomer
Breaking strength: > 2200 daN

D-ring:
Raw material: Ø7 mm Stainless steel
Breaking strength: > 5000 daN

Adjustment buckles:
Raw material: 45 mm Aluminium alloy
Breaking strength: > 850 daN

Standards

Small plastic carry case 325 x 110 x 300

EN 360

EN 361