

# Crosby® SHUR-LOC® Hooks

**Fatigue Rated**

**"QT"**  
QUENCHED & TEMPERED

**QUIC-CHECK®**



**SEE APPLICATION AND WARNING INFORMATION**

Para Español: [www.thecrosbygroup.com](http://www.thecrosbygroup.com)

On Pages 242-243

**Crosby 8/10™**

**S-1316**



All SHUR-LOC® hooks have the following features:


- Forged Alloy Steel - Quenched and Tempered.
- Recessed trigger design is flush with the hook body, protecting the trigger from potential damage.
  - Easy to operate with enlarged thumb access.
- Positive Lock Latch is Self-Locking when hook is loaded.
- The SHUR-LOC® hook, if properly installed and locked, can be used for personnel lifting applications and meets the intent of OSHA Rule 1926.550 (g) (4) (iv) (B).

**S-318A**



**Eye Style incorporates these added features:**


- Individually Proof Tested to 2-1/2 times the Working Load Limit with certification.
- Fatigue rated at 1-1/2 times the Working Load Limit at 20,000 cycles.
- 25% stronger than Grade 80.
- Suitable for use with Grade 100 and Grade 80 chain.
- Designed with "Engineered Flat" to connect to S-1325 chain coupler.

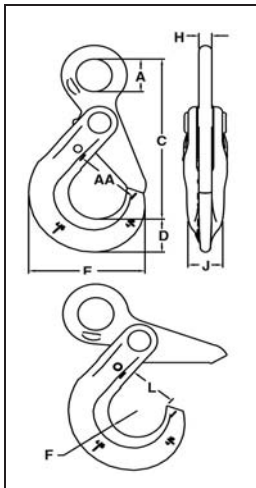

## SHUR-LOC® Hook Series with Positive Locking Latch S-1316 Eye Hook

Chain Size		Working Load Limit (lbs.)*	S-1316 Stock No.	Weight Each (lbs.)	Dimensions (in.)						
(in.)	(mm)				A	C	D	E	J	L	AA
-	6	3200	1022896	.85	.78	3.95	.79	2.60	.63	1.14	1.50
1/4-5/16	7-8	5700	1022914	1.80	1.08	5.31	1.10	3.50	.81	1.48	2.00
3/8	10	8800	1022923	3.40	1.30	6.57	1.17	4.39	.94	2.21	2.50
1/2	13	15000	1022932	6.00	1.65	8.23	1.67	5.45	1.16	2.22	3.00
5/8	16	22600	1022941	15.1	2.20	10.06	2.04	6.56	1.50	2.65	3.50
3/4	18-20	35300	1022942	19.0	2.60	10.77	2.22	7.76	2.03	3.52	-
7/8	22	42700	1022943	28.0	2.87	12.49	2.45	8.75	2.20	3.83	-
1	26	59700	1022944	49.5	3.15	14.60	3.21	9.87	2.68	4.09	-

\* Minimum Ultimate Load is 4 times the Working Load Limit.

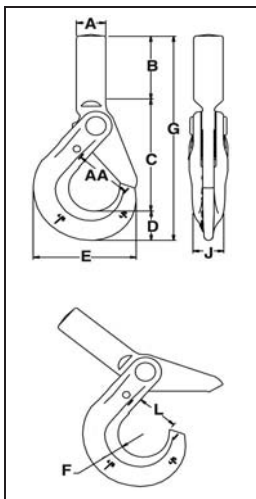

## S-318A SHUR-LOC® Shank Hooks

Chain Size		S-318A Stock No.	Frame Code	Grade 80 Alloy Chain Working Load Limit (lbs.)*	Dimensions (in.)										Weight Each (lbs.)
(in.)	(mm)				A†	B	C	D	E	F	G	J	L	AA	
-	6	1098101	D	2500	.79	2.16	3.31	.79	2.60	.67	6.26	.63	1.16	1.50	1.00
1/4-5/16	7-8	1098112	G	4500	1.00	2.40	4.16	1.10	3.51	.87	7.66	.81	1.48	2.00	1.99
3/8	10	1098123	H	7100	1.14	2.95	5.14	1.17	4.39	1.10	9.26	.94	1.83	2.50	3.56
1/2	13	1098134	I	12000	1.34	3.35	6.31	1.67	5.49	1.26	11.33	1.16	2.22	3.00	7.00
5/8	16	1098145	J	18100	1.63	3.94	7.28	2.04	6.55	1.50	13.26	1.50	2.65	3.50	16.00

\* Ultimate Load is 4 times the Working Load Limit.

† Dimension before machining (as forged).

**SELBY ENGINEERING & LIFTING SAFETY LTD.**  
Lifting Equipment and Height Safety Specialists  
[www.liftingsafety.co.uk](http://www.liftingsafety.co.uk) [sales@liftingsafety.co.uk](mailto:sales@liftingsafety.co.uk)  
Tel: +44 (0) 1977 684 600 Fax: +44 (0) 1977 685 300