


# Boomer Chains / Tail Chain


## C-188

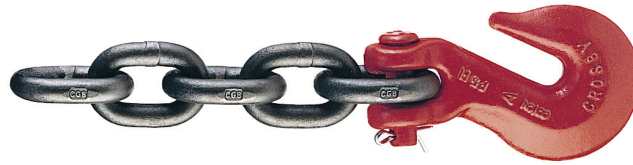

### C-188 Spectrum 8® Alloy Boomer Chains

- Heat treated alloy steel.
- Ends fitted with Crosby A-330 Quenched and Tempered alloy clevis grab hook.
- Finish - Self Colored.
- Meets or exceeds DOT and CVSA Cargo Securement Tie-Down Guidelines, November 2003.

Chain Size (in.)	C-188 Stock No.	Working Load Limit (lbs.)	Standard Length (ft.)	Weight Each (lbs.)
3/8	279889	7100	20	30.28
1/2	279898	12000	20	54.04

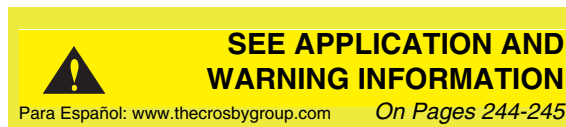

## L-180



### L-180 Winchline Tail Chains

- Hooks are Forged - Quenched and Tempered.
- Individually Proof Tested.
- Spectrum 4® High Test Carbon Steel from 5/16" thru 5/8".
- Spectrum 8® Alloy Steel from 3/4" thru 1-1/8".
- Meets or exceeds DOT and CVSA Cargo Securement Tie-Down Guidelines, November 2003.

Wire Rope Diameter (in.)*	L-180 Stock No.	Working Load Limit (lbs.)†	Length (in.)	No. of Links	Weight Each (lbs.)
5/16-3/8	1091473	5400	18	11	3.0
1/2-5/8	1091482	13000	18	7	6.2
3/4-7/8	1091511	34200	24	8	18.2
1- 1 1/8	1091516	47700	18	5	21.2
1 - 1 1/8	1091525	47700	24	7	23.3
1-1/4	1091532	72300	24	5	40.0

\* Recommended for IPS or XIP (EIP), RRL, FC or IWRC wire rope.

† Ultimate Load is 3.5 times the Working Load Limit.