

MINI INDUSTRIAL TCR250 TCR500 TCS500

TCR 250 TCR 500 TCS500

Lightweight (Aluminium housing) pneumatic hoists suitable for applications where duty is onerous. The compact design improves handling whilst maintaining high performance. Red Rooster pneumatic hoists comply with the European Machinery Directive and are CE marked.

High speed TCS500


The speed of the TCS hoist can be changed by adjusting a valve on the outside of the hoist. The new polycarbonate pendant gives superb control even at low speeds. Comes complete with a plastic chain collector up to 5 metre H.O.L.



Type	Capacity kgs	Lifting speed full load m/min	Lifting speed w/o load m/min	Standard control length m	Number of chain falls	Air cons full load l/sec	Air connection BSP*	Hose Dia mm	Weight with 3m lift
TCR-250	250	9.3	19	2	1	11.7	3/8"	13	7
TCR-500	500	4.5	9.5	2	2	11.7	3/8"	13	8.5
TCS-500	500	17	43	2	1	34	1/2"	13	15.9

* For hose lengths in excess of 10 metres, diameter should be increased. All models operate at pressures down to 4 bar but speeds will be significantly reduced at lower pressures.

Mini Industrial
TCR-250 TCR-500
TCS-500

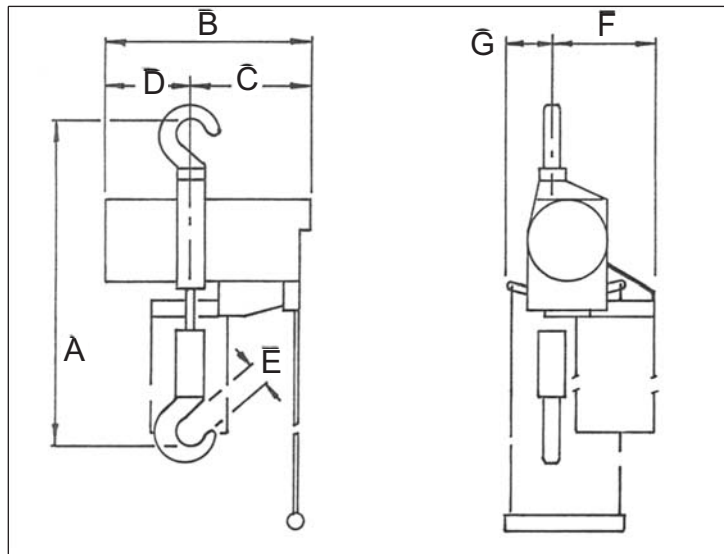

TYPE	A	B	C	D	E	F	G
TCR-250	310	230	120	110	22	67	32
TCR-500	370	230	120	110	22	67	66
TCS-500	410	365	193	161	30	105	56

PNEUMATIC HOISTS

**Mini Industrial
TCR 250 TCR 500
TCS500**

Features

- Toku rotary vane motor.
- Robust epicyclic gearbox (grease filled and sealed).
- Choice of pull cord or pendant control.
- Mechanical, paddle action upper and lower limit switches.
- Aluminium housing.
- Variable speed.
- Internal silencing.
- Carbon steel swivel hooks with safety catches.
- Load chain of European manufacture (DIN5684).

MINI INDUSTRIAL

www.rriuk.com
to download ebrochure

