


Self retracting
Fall arrester *Rebel 6m : AD120*



*Rebel 6m, the
ideal alternative.*

*It benefits from an
excellent weight/
length ratio.*

*On site, it provides
exceptional safety
and a high level of
user comfort, due
to its upper swivel
connection point
and impact
load
indicator.*



S E L S SELBY ENGINEERING & LIFTING SAFETY LTD.
Lifting Equipment and Height Safety Specialists
www.liftingsafety.co.uk sales@liftingsafety.co.uk
Tel: +44 (0) 1977 684 600 Fax: +44 (0) 1977 685 300

Put your trust in its versatility!

- The figures say it all: a compact size: 136 x 136 x 52 mm, with a weight of 2.3 Kg.
- Aluminium and stainless steel housing
- 6m length
- Swivel connection point
- Energy-dissipating element: absorption sewing
- High reel sensitivity
- Conforms to European standard EN 360

Self retracting fall arrester *Rebel 6m : AD120*



The Rebel 6m is the solution that combines convenience with safety.


In a word : PRACTICAL. The Rebel 6m has some amazing characteristics. Its 6m usage length permits work to be carried out over a large area. Its swivel connection point prevents the line from twisting. Finally, the extreme sensitivity of the lifeline reel, which puts an end to the unpleasant feeling of restraint. Overall, you have great freedom of movement, whilst remaining secured.

Greater durability. With its aluminium and stainless steel housing, the Rebel benefits from high shock resistance and resistance to wear, assuring it a long life.

Maximum safety + The Rebel 6m is equipped with a 25mm thick polyester line, with a resistance greater than 2000 daN. Its absorber sewing can also be used as an impact load indicator.

Standards. The Rebel 6m conforms to the European standard **EN360**.

This block may be subject to revisions and/or repairs.

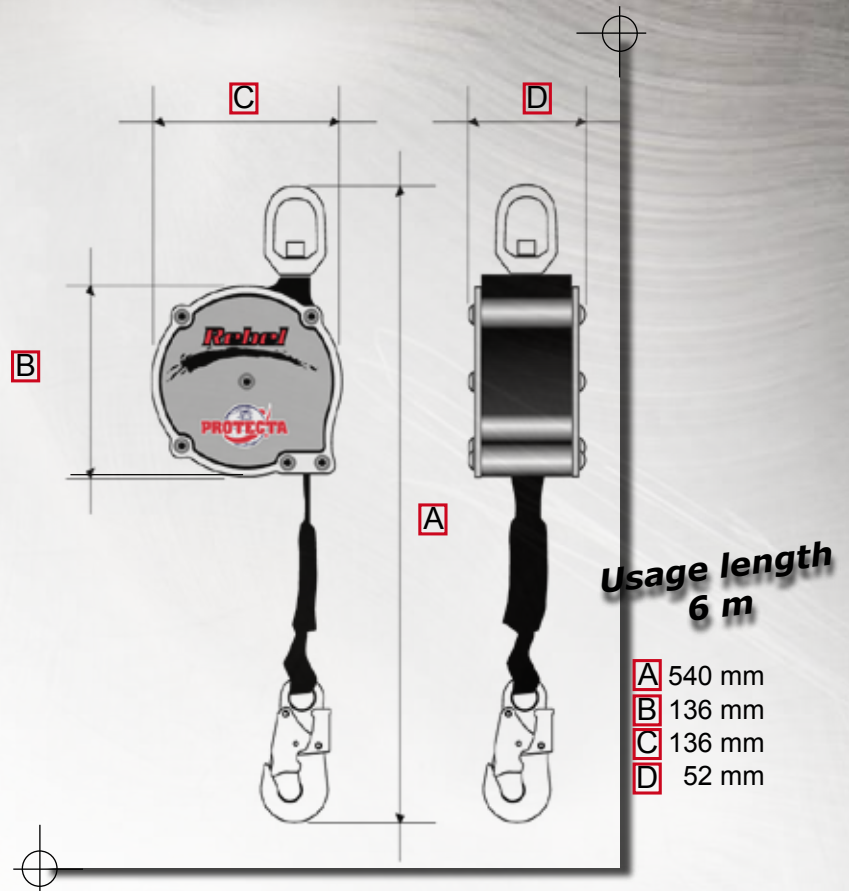

This is only one version of Rebel 6m : AD120

Also available to try: the Rebel 3m : AD111

Specifications :

Strap : 25mm thick polyester, resistance > 2 000 daN.

Energy-dissipation device : Absorber sewing

Housing : Aluminium and stainless steel.

Bottom snap hook : AJ565A, 19 mm opening, steel.

Resistance to tear : > 15 kN.

Weight : 2.30 Kg.

Dimensions : 136 x 136 x 52 (in mm).

Associated products :

• Fall-arrest harnesses conforming to the EN361 standard. Particularly well suited to use with the Protecta AB118 harness (for working on towers) or the AB105 (maintenance, framework...)

Capital Safety :

Europe, Middle East & Africa : +33 (0) 497 10 00 10

Northern Europe: +44 (0) 1928 57 1324

USA: 800-328-6146

Canada: 800-387-7484

Asia: +852 2992 0381

Australia/New Zealand : 800-245-002

Or visit : **WWW.CAPITALSAFETY.COM**