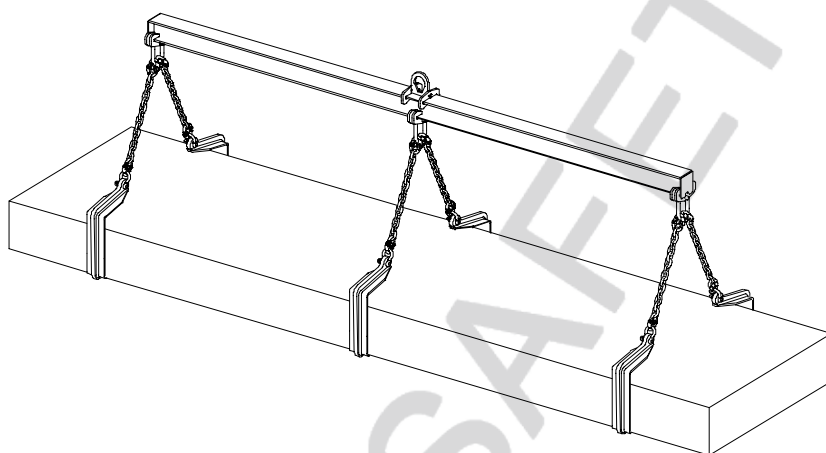
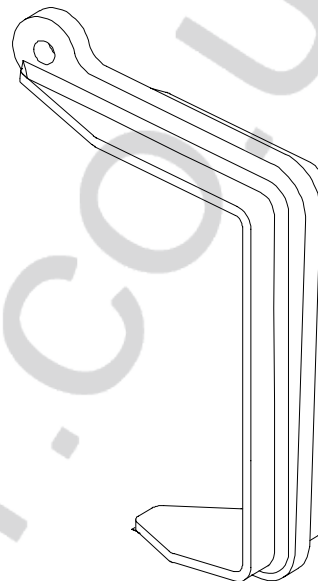
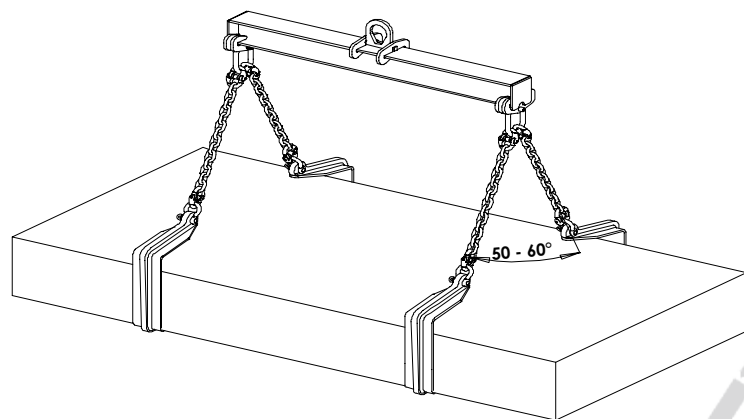


**Applications**

Lifting of horizontal plates (individual or bundles).

**Description**

These accessories allow handling thick loads thanks to their opening up to 300 mm.  
Slings not provided.

**Functioning**

Use in 4s with two 2-legged slings and lifting beam.

Place the load into the hooks, distributing them evenly and perform lifting.

**Particular instructions**

- The load must always be driven home into the throat of the hook.
- Adhere to a sling angle included between 50° and 60° (ie ½ sling angle included between 25° and 30°).
- Do not separate sheets with the hooks' end.
- Working temperature: -20° to +100°C.

**technical sheet**

**QS**

**simple hooks for horizontal plate lifting**

ref. : **T 6019 GB**  
 rev. : **2**  
 date : **Jun. 03**  
 page : **2 / 2**

**General characteristics**


- Manufacture without load bearing welds.
- Hot epoxy coating.
- Safety factor: 4 in accordance with the European Materials Handling Federation (1998 FEM 3<sup>rd</sup> edition) ; working group A5 and lifting speed 60 m/ mn.

**Dimensional characteristics**

Ref.	Group code	WLL/ pair kg	Opening		A	B	C	E	F	G	H	I	J	Sling angle		Min chain* Ø	Weight/ pair kg
			min	max										min	max		
QS1,5 0-300	50678	1 500	0	300	279	20	387	128	22	22	20	100	20	50°	60°	8	13
QS3 0-300	50688	3 000	0	300	305	20	410	120	40	40	20	100	20	50°	60°	10	18
QS6 0-300	50698	6 000	0	300	380	20	410	120	50	50	26	100	25	50°	60°	13	30

\* provide a 2-legged chain sling grade 80 per pair of hooks

Dimensions in mm

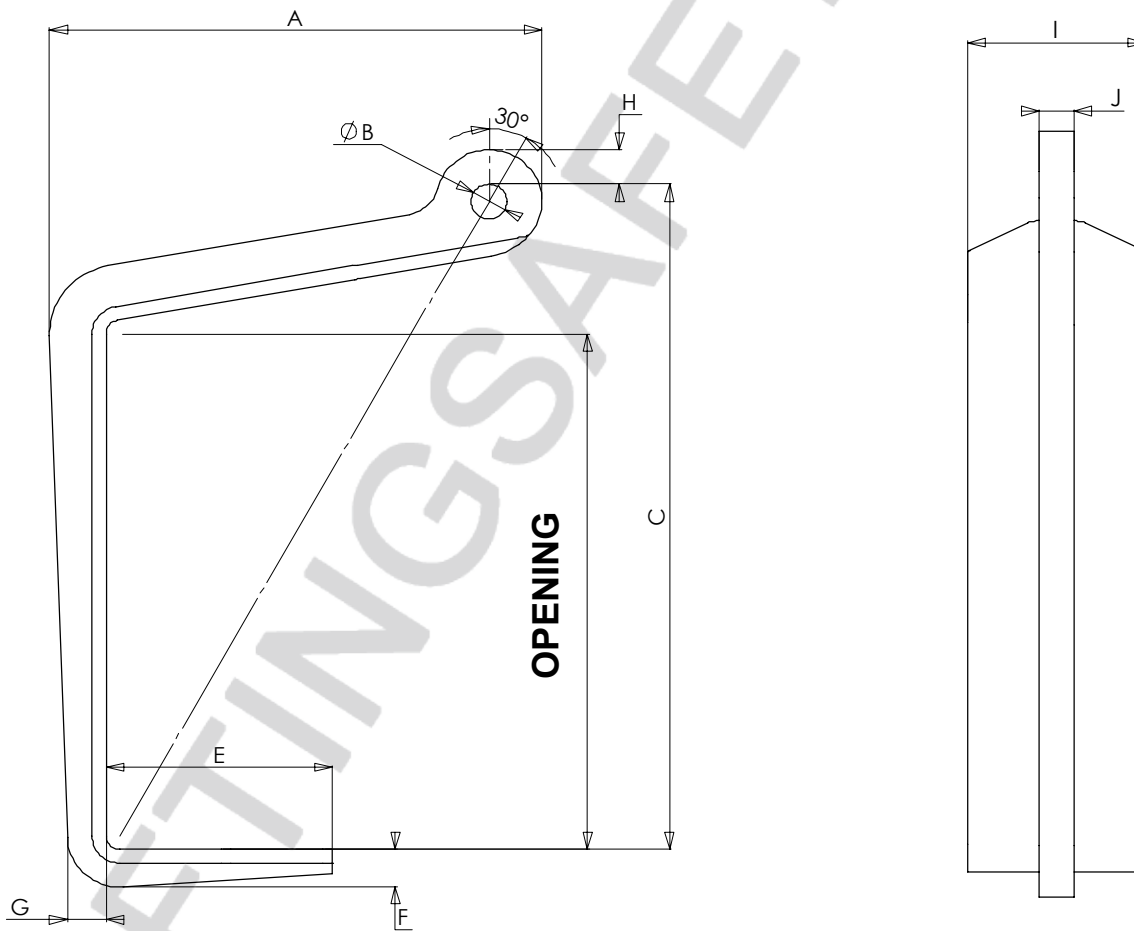

**Options on request**

- Chain/ cable slings.