

technical sheet

HANDIFOR™ micro-weigher 20, 50 , 100, 200 daN

réf. : T 2017 GB
rév. n° : 5
date : 06/08
page : 1/1

Lifting accessory in accordance with EUROPEAN DIRECTIVES

N° 89/392 - 91/368 - 93/68

and with EUROPEAN STANDARDS EN 292 -

EN 55 022 - EN 50 082.2.

General specification:

Liquid cristal display(LCD): 4 digits

Height of digits : 14 mm

Unit of measurement : daN / kg / lbs

Capacities daN	20	50	100	200
Accuracy daN	±0,15	±0,4	±0,8	±1,6
Smallest load daN	0,05	0,1	0,2	0,4
Overload coefficient	2	2	1,4	1,4
Coefficient Safety	>10	>10	>10	>10

Ambient temperature range : 0°C à 40°C

Body in aluminium alloy for 20/50/100 daN models

Body in stainless steel 316 L for 200 daN model

Outer casing : ABS-PC

IP 40 protection

Overall dimensions :

140 x 80 x 40 mm for 20/50/100 daN models

147 x 80 x 40 mm for 200 daN model

Anchor points :10 mm diameter

Lost height :

without hook : 125/130 mm

with hook : 305 mm for 20/50/100 daN models

with hook : 310 mm for 200 daN model

with handfull and hook : 275 mm for 200 daN model

Weight : 220 g with batteries for 20/50/100 daN

: 340 g with batteries for 200 daN

Power supply : 2 x1,5 V -AA/R6 type

Batterie life : 100 hours, with high quality batteries

Push button controls :

On /Off (push button T1)

100 % tare (push button T2)

Peak hold (push button T3)

Automatic functions :

Automatic zero (if the load applied is less than 10% of the unit capacity)

Low battery indicator

Overload indicator

Adjustable functions :

Weight unit : daN / kg / lbs

Standards supply :

Handifor™ unit

Operating and maintenance instructions,

2 batteries : 1,5 V, AA/R6 type.



Pouch

2 «S»hooks or


1 hook and 1 handfull for capacity 20 kg

CE declaration of confirmity

Packing box : 240 x 155 x 80 mm

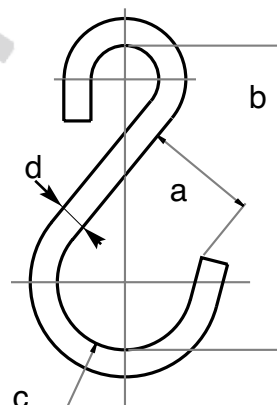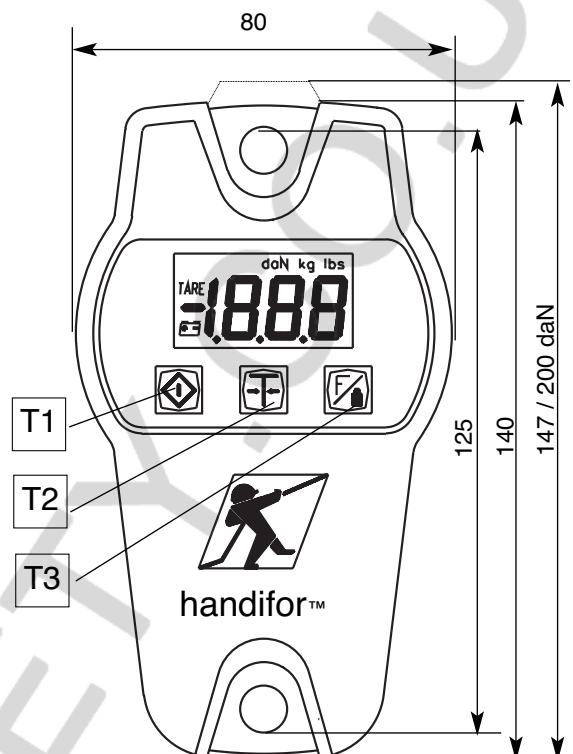

	20/50/ 100	200
a	33	33
b	90	90
c	40	40
d	8	11

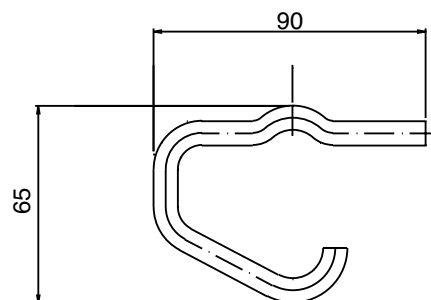

Option :

Calibration certificate