


Complies with **BS6037**

The Solsit comprises:

- ❑ **1 No. Tirak X300P lifting hoist** with 48V controls, 16 Amp power take-off, 3 pin Ceeform socket and with centrifugal brake which, when manually operated, allows controlled emergency descent in the event of a power failure.
- ❑ **1 No. Overspeed Blocstop secondary safety device**, designed to operate directly to the speed of the Tirak and to provide protection against suspension wire rope failure and hoist malfunction.
- ❑ **1 No. Upper limit switch assembly**, designed to stop the cradle on ascent by means of a buffer plate.
- ❑ **1 Set of powered reelers** for storage of lifting and safety wire ropes. The reelers are designed to store the ropes on ascent and to play the ropes off the drums during descent.
- ❑ **2 No. Tirak Maxiflex wire ropes**, lifting and safety, in galvanised steel with a 10:1 safety factor



The **Solsit** is also fitted with a safety lap belt, leg guard, wall wheels, castors and two buckets for tools and materials.

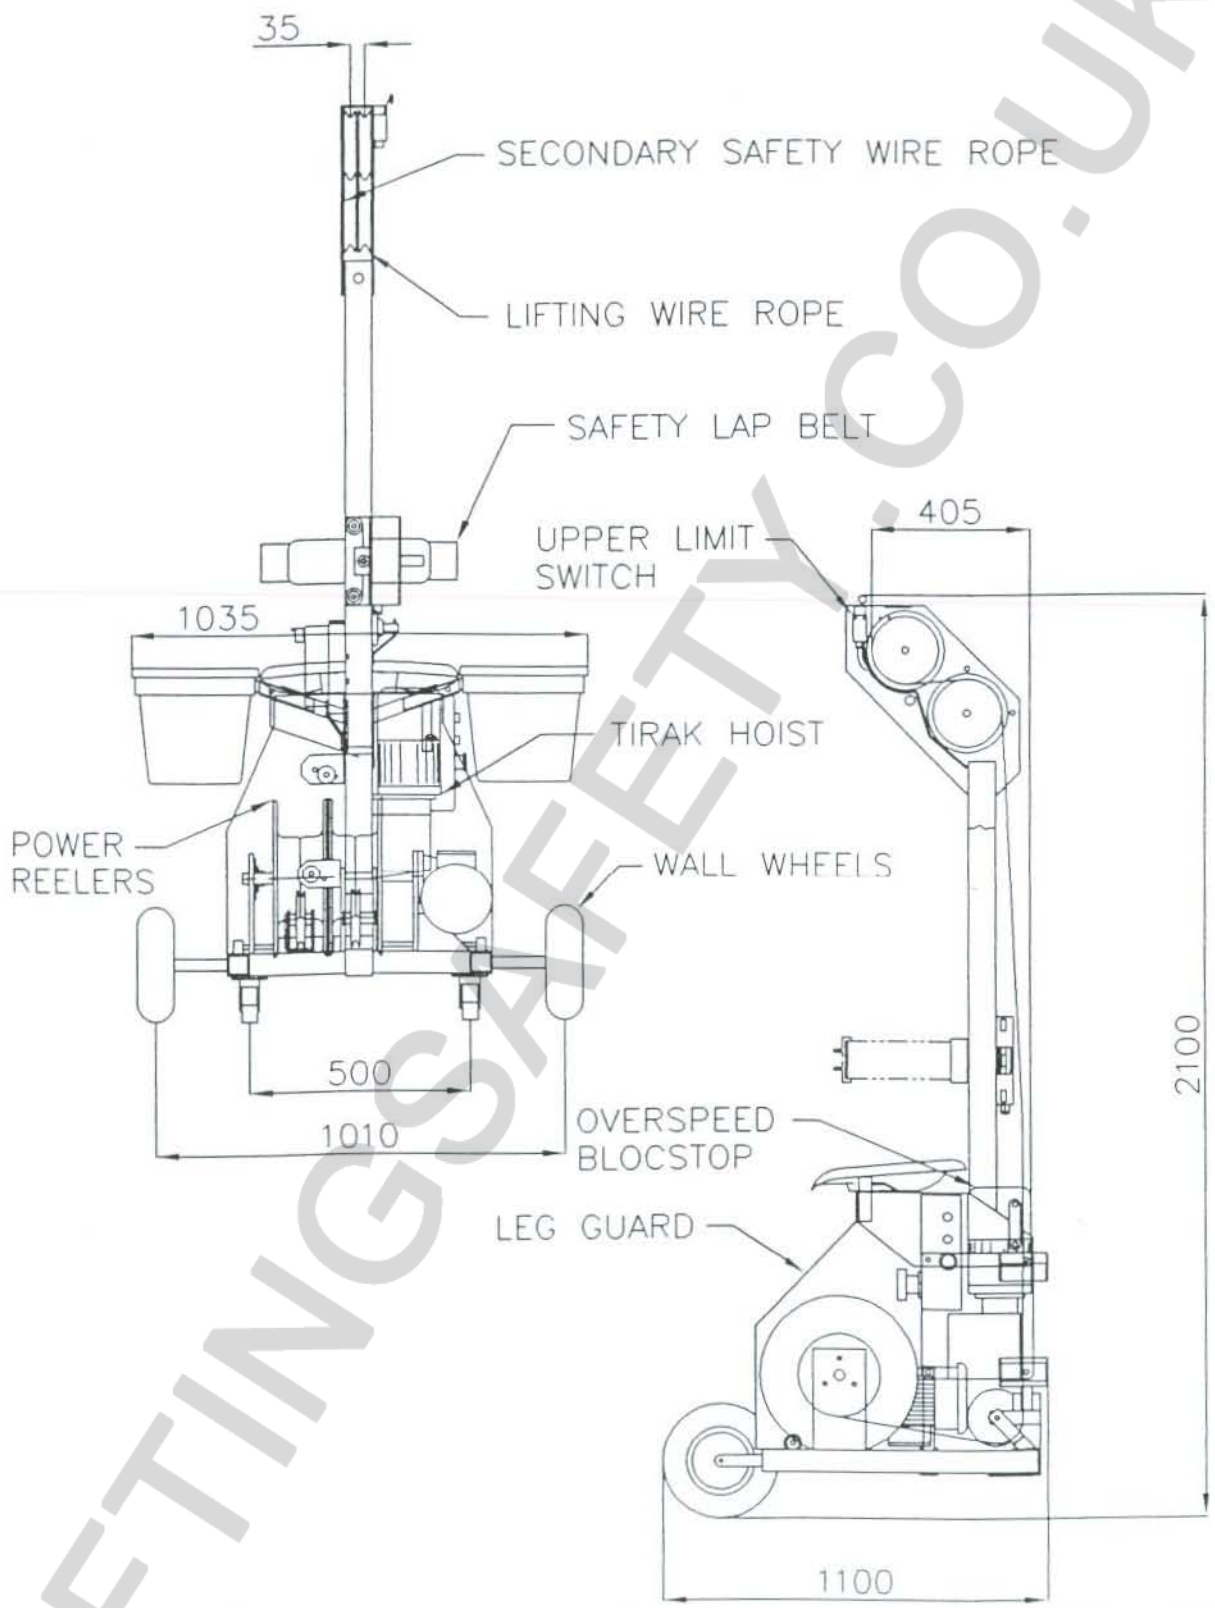

MATERIAL	GEN TOL	SCALE NTS	CHECKED	DRAWN S.P.TWELVES
			APPROVED	DATE 28/4/99

Tractel UK LTD
 TEL: (0114) 248 2266 FAX: (0114) 251 3596

SOLSIT FULLY POWERED
ONE MAN SEAT

This drawing is the property of TIRFOR LTD and may not be copied or used for any other purpose than that for which it is supplied without the express written authority of TIRFOR LTD.

DRAWING No. _____ REV _____