

The Intelligent and Versatile Anchorage Point



- **Fall Arrest anchor rated for 2 users in 2 directions. Allows also a rescuer to anchor in complete safety.**
- **Equipped with fall indicator for an easy visual inspection.**
- **Allows connection of lanyard or horizontal temporary lifeline (i.e. EZ-Line™) to enable worker being connected in either fall restraint or fall arrest.**
- **22kN rated anchorage point.**
- **Complies to CE EN795 Class A standard.**

PLAKET® Anchor-Fall Arrest Anchor Point



Maximum flexibility of use and installation:

The PLAKET® Anchor point offers multiple positions of use : horizontal, vertical and oblique to fit any configuration of work.

It is fixed with a single M12 screw or chemical fixing.

To avoid risk of roll out, it is recommended to use for 1 single user any hook/karabiner and for 2 users only screw-gate karabiners.



Can be used on multiple applications:



Construction & Building Maintenance



Wind Energy



Industry




Manufacturing

PLAKET® Anchor Model :

2130006 - PLAKET® Anchor-Fall Arrest Point

Specifications:

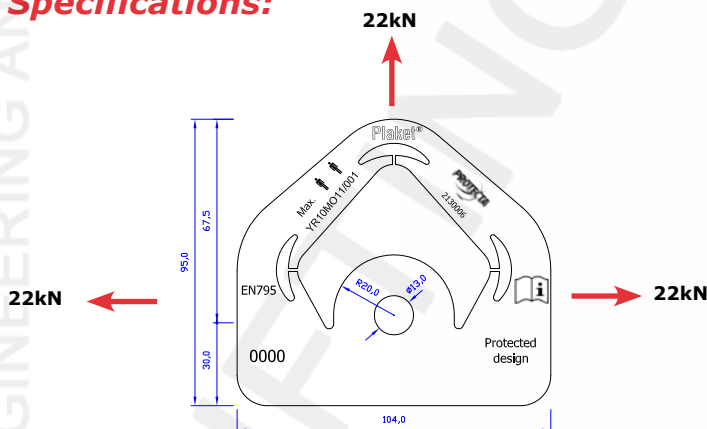

Weight: 180g

Anchor strength: 22kN (maxi : 2 people)

Material: Stainless Steel AISI316

Standard : CE EN795 Class A