

Container Top Lifting Lugs

Top Container Lifting Eyes (set x4).

Features

- Self locking and suitable for shackling direct to 4 vertical slings.
- ISO Container (International Organization for Standardization)
- For use with a spreader beam, do not project over container.




Instructions

1. Lug is offered up to slot.
2. Lug is entered into slot.
3. Lug is turned through 90 degrees to position.
4. Press down latch fully.
5. Lug is now in lifting position.


Technical Information

Model	Type of Lift	WLL (set of 4)	Chain Angle	Weight (set of 4)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)
CLT 56	Top Lift	56 tonnes	Vertical	28kg	123	217	45 dia.	39	57	101	121

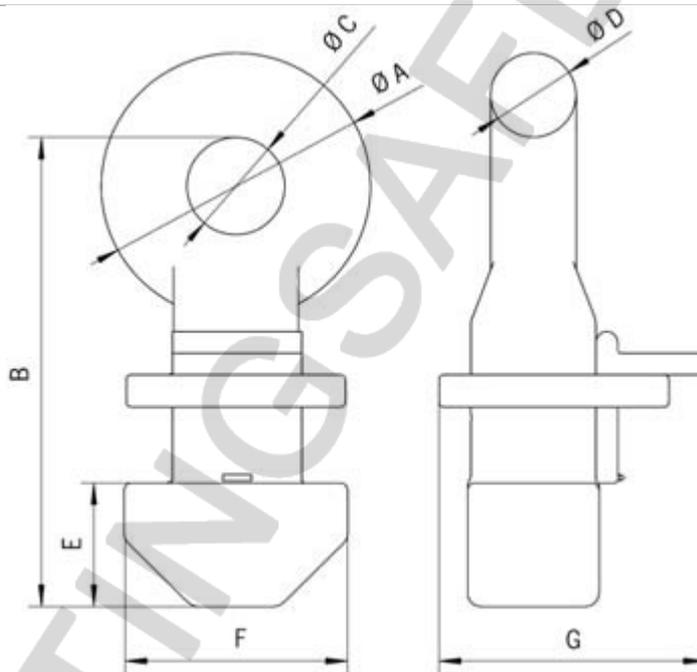

LIFTING SAFETY

Load Positions

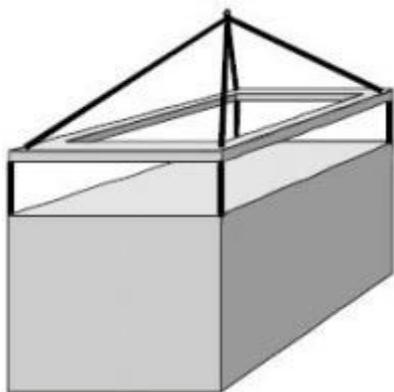

2: top only.

For maximum load capacity a lifting frame can be used with the lugs attached as above.

Un-Safe Positions

UN-SAFE, DO NOT USE.

