


<b>fiche technique</b>	<b>Accessoires travaux sur corde</b> <b>Pédale d'ascension</b>	ref. : T 2292 F / GB rev. n° : 01 date : 04/2008 page : 1 / 1
<b>technical data sheet</b>	<b>Accessories rope access</b> <b>Ascent pedal</b>	
<b>Ref : 40122</b>		
	 <p>The diagram illustrates the Ascent Pedal, which consists of a grey strap with a metal buckle and a handle attached by a carabiner. The handle is designed for gripping and has a loop for ascending a rope.</p>	<p><b>F</b></p> <p><b>Fonction</b> La pédale d'ascension équipée d'une poignée d'ascension utilisée en association avec un bloqueur permet de se déplacer sur un cordage de manière autonome du bas vers le haut.</p> <p><b>Utilisation</b> La pédale d'ascension est en sangle PA de 20 mm réglable de 0.80 à 1.60 m.</p> <p><b>Caractéristiques techniques</b></p> <ul style="list-style-type: none"> <li>• Pédale sangle polyester de 20 mm.</li> <li>• Boucle de réglage acier zingué.</li> <li>• Livrée sans connecteur et sans poignée.</li> <li>• Longueur : 1,4 m.</li> <li>• Poids : 70 g.</li> </ul> <p><b>GB</b></p> <p><b>Function</b> The handle, equipped with an ascending loop used with a rope clamp, enables independent upward movement along a rope. The rope clamps are used independently for rope maneuvers.</p> <p><b>Use</b> The ascending loop is made of 20 mm PA strap, adjustable from 0.80 to 1.60 m.</p> <p><b>Technical specifications</b></p> <ul style="list-style-type: none"> <li>• Ascending loop PA 20 mm.</li> <li>• Adjustable buckle zingued plated.</li> <li>• Supplied without connector and Handle</li> <li>• Length : 1,4 m.</li> <li>• Weight : 70 g.</li> </ul>

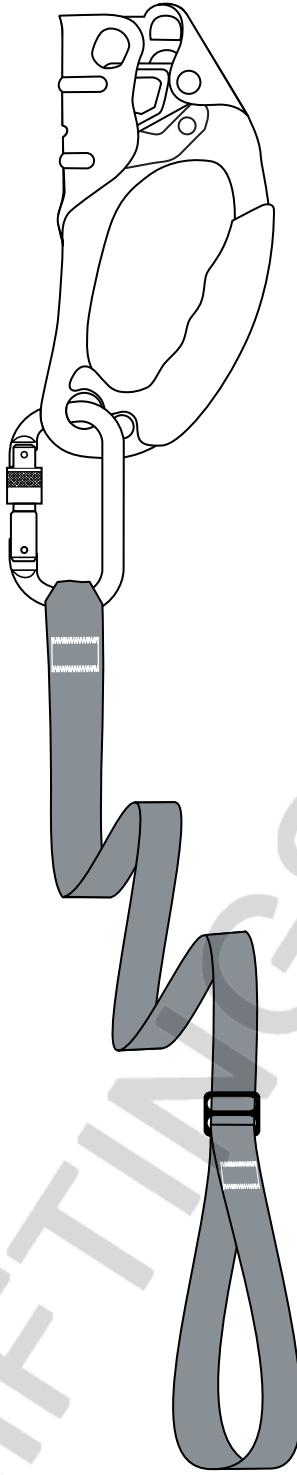