



50 Ton Capacity 9000 Series



Machine Screw Actuators

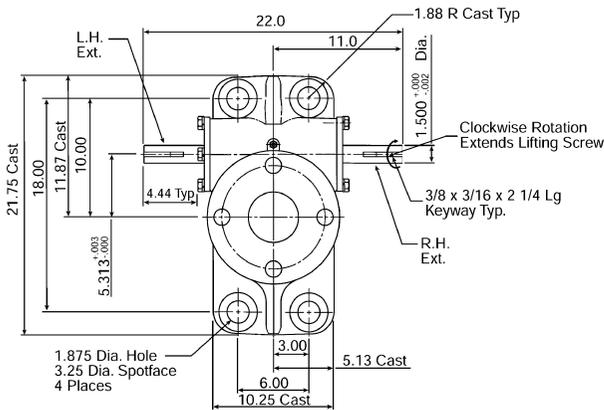


4 1/2 Diameter x .666 Lead Lifting Screw

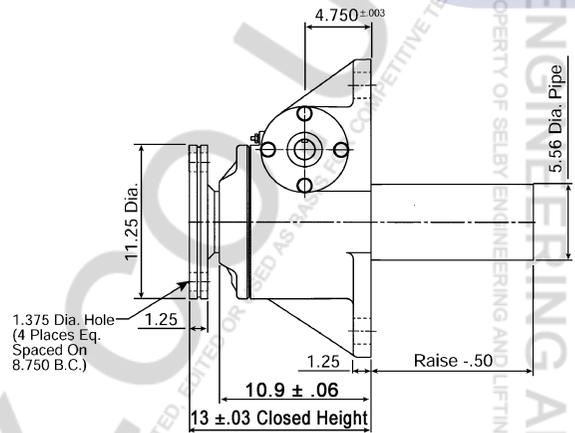


Upright: M-9050

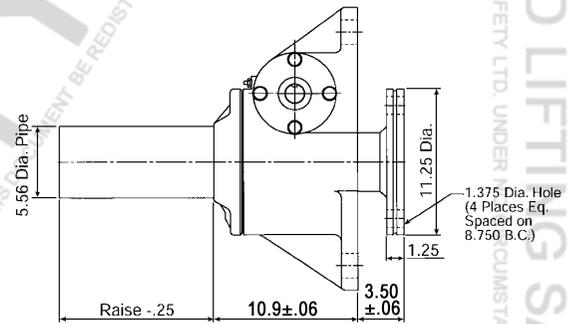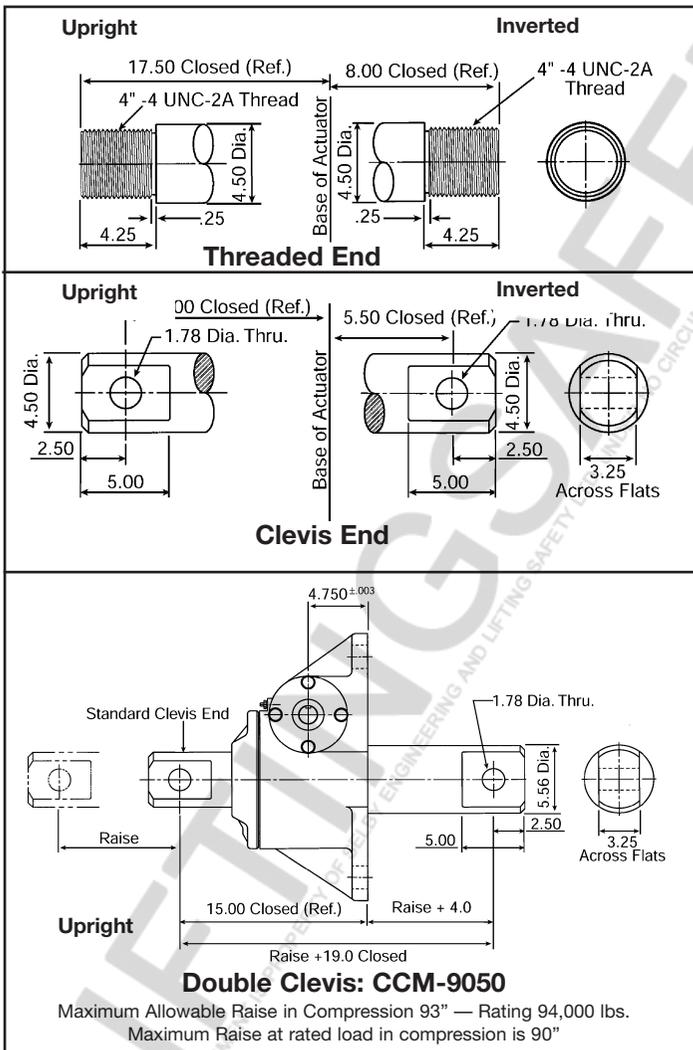

Inverted: M-9049

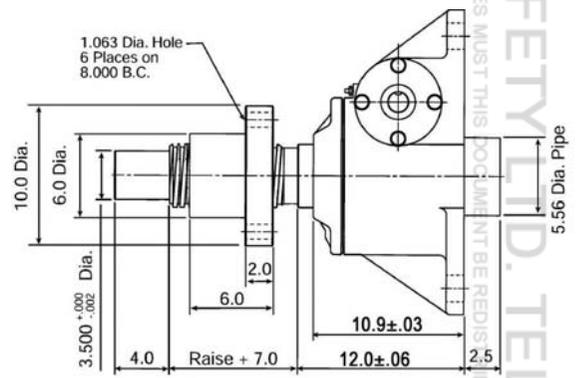

Upright Rotating: UM-9051

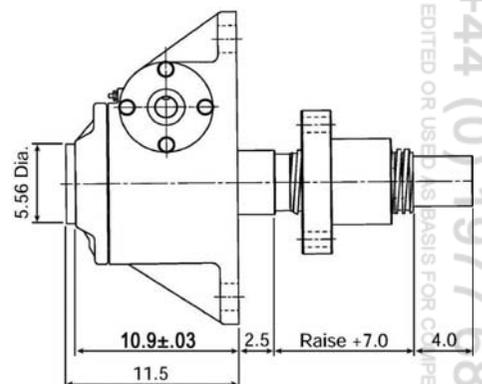


Inverted Rotating: DM-9051




Note: Lifting screw is not keyed. Top should be secured to a lifting member to prevent rotation. When a Bellows Boot is required, see pages 143-144. Dimensions are subject to change without notice.

Machine Screw Actuators

50 Ton Capacity 1800 Series

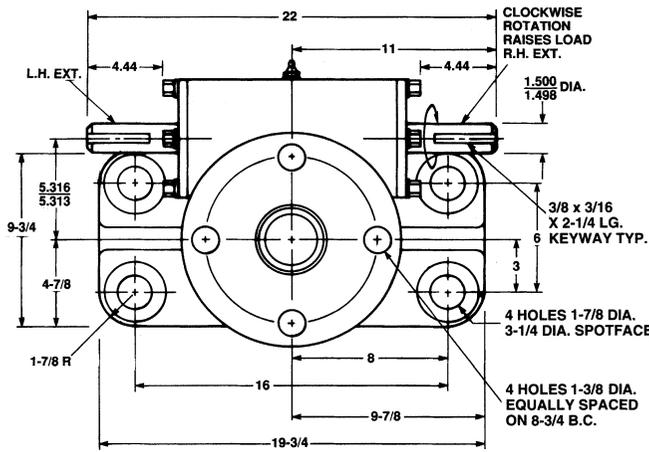

4 1/2" Diameter x .666 Lead Lifting Screws

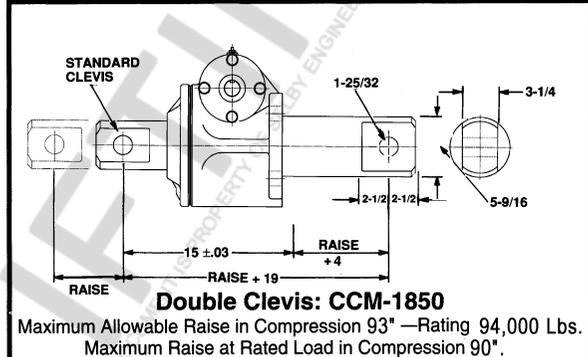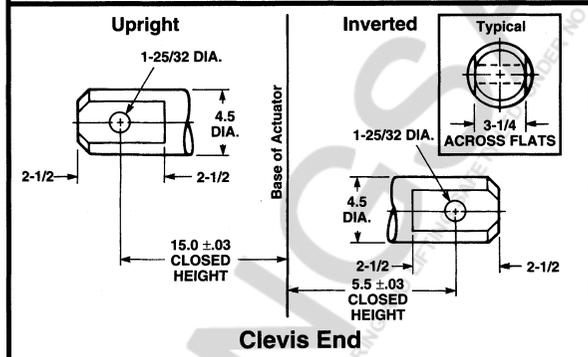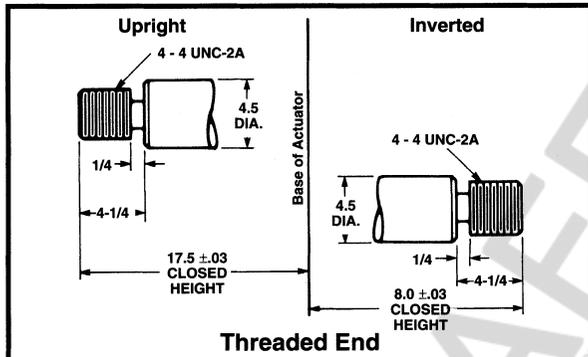

Note: Lifting screw is not keyed. Top should be secured to a lifting member to prevent rotation. When a Bellows Boot is required, see pages 143-144. Dimensions are subject to change without notice.

