



SELBY ENGINEERING AND LIFTING SAFETY LTD. TEL: +44 (0) 1977 684 600
 THIS DOCUMENT IS PROPERTY OF SELBY ENGINEERING AND LIFTING SAFETY LTD. UNDER NO CIRCUMSTANCES MUST THIS DOCUMENT BE REDISTRIBUTED, EDITED OR USED AS BASIS FOR COMPETITIVE TENDER

Machine Screw Actuators



2 Ton Capacity 9000 Series

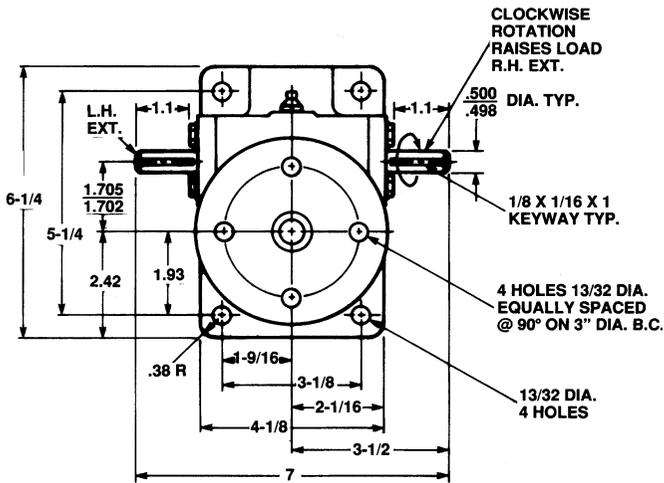


1" Diameter x .250 Lead Lifting Screws

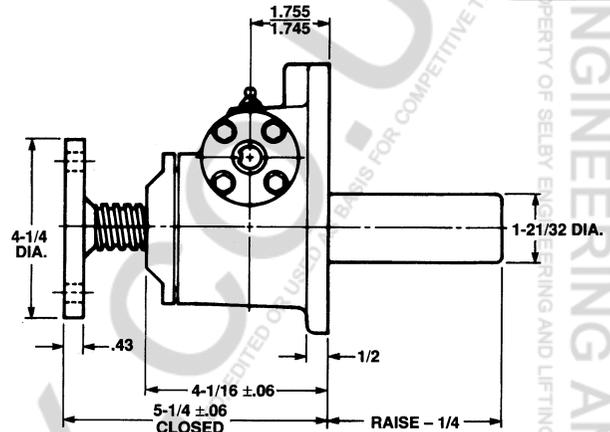


Upright: M-9002

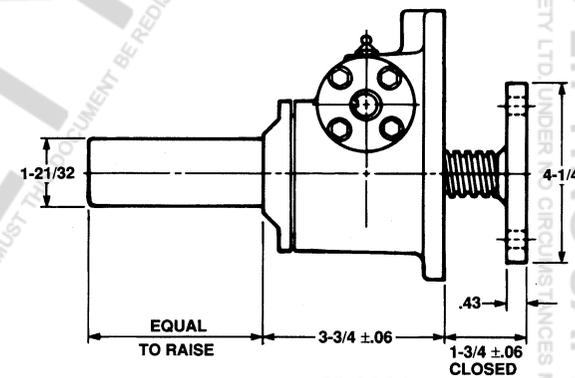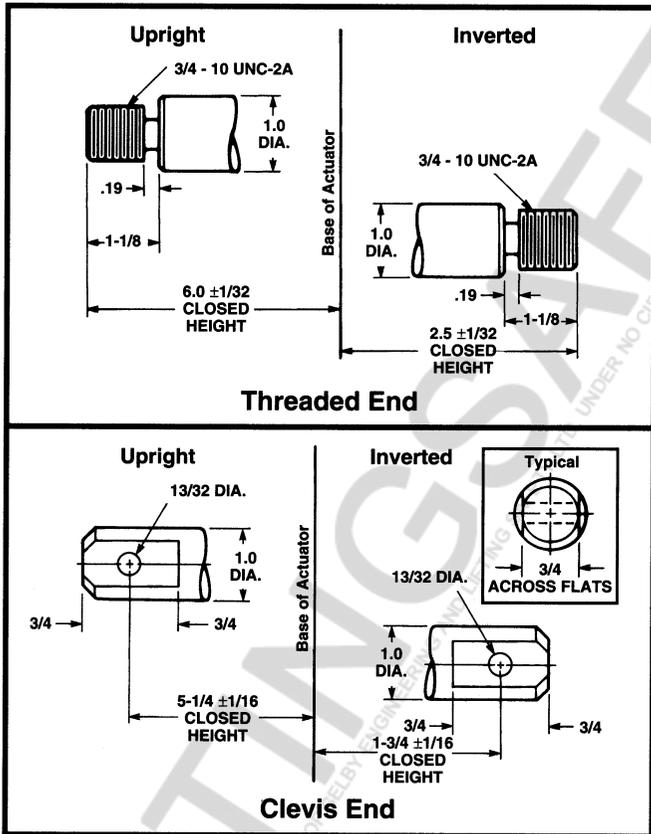

Inverted: M-9001

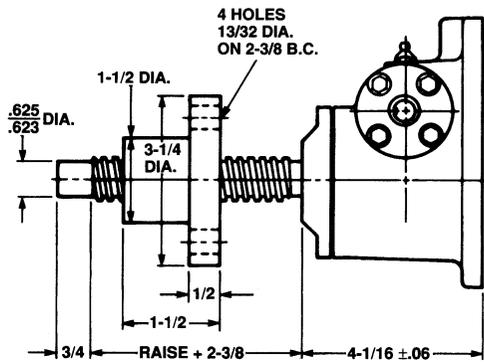

Upright Rotating: UM-9003

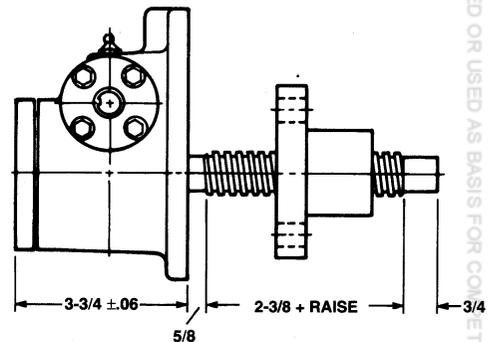


Inverted Rotating: DM-9003

Note: Lifting screw is not keyed. Top should be secured to a lifting member to prevent rotation. When a Bellows Boot is required, see pages 143-144. Dimensions are subject to change without notice.


SELBY ENGINEERING AND LIFTING SAFETY LTD. TEL: +44 (0) 1977 684 600
 THIS DOCUMENT IS PROPERTY OF SELBY ENGINEERING AND LIFTING SAFETY LTD. UNDER NO CIRCUMSTANCES MUST THIS DOCUMENT BE REDISTRIBUTED, EDITED OR USED AS BASIS FOR COMPETITIVE TENDER

Machine Screw Actuators


2 Ton Capacity 7000 Series

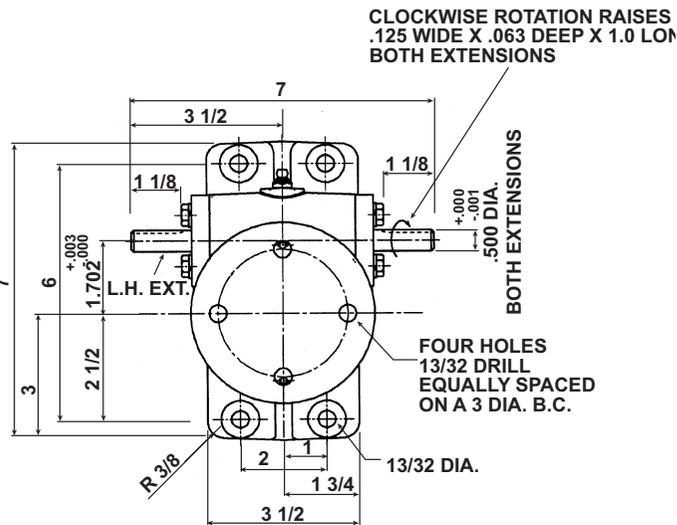


1" Diameter x .250 Lead Lifting Screw

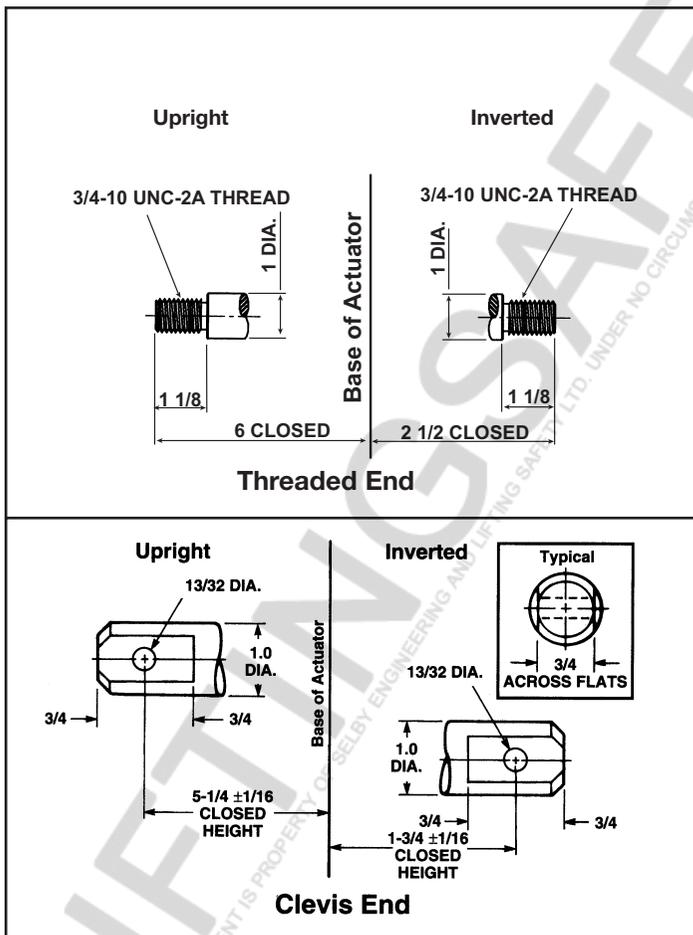


Note: Lifting screw is not keyed. Top should be secured to a lifting member to prevent rotation. When a Bellows Boot is required, see pages 143-144. Dimensions are subject to change without notice.

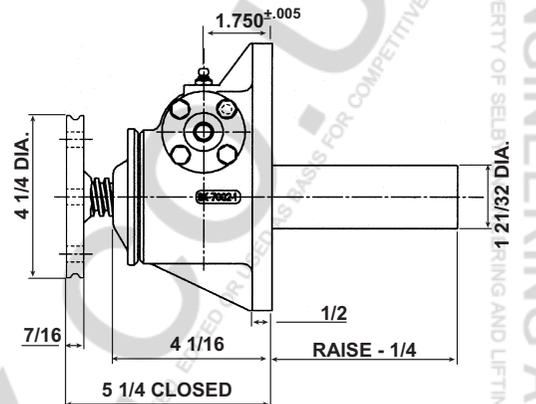


Upright: M-7002

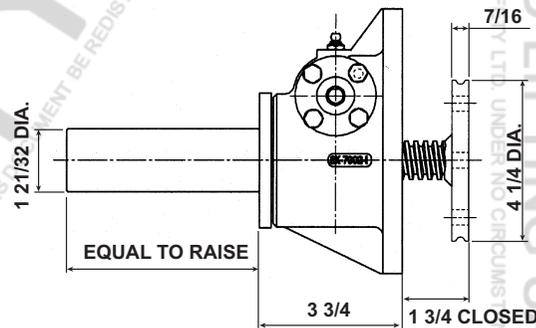

Inverted: M-7001

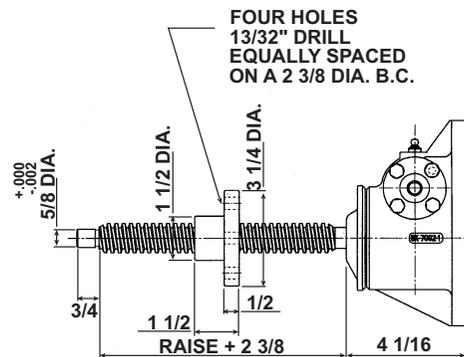



Upright Rotating: UM-7003

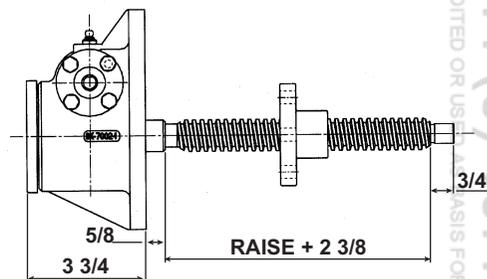

Inverted Rotating: DM-7003


Machine Screw Actuators

2 Ton Capacity 1800 Series

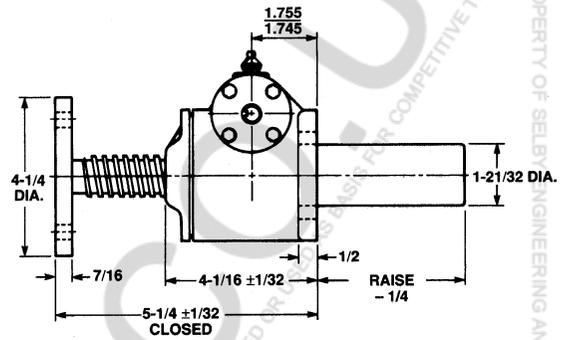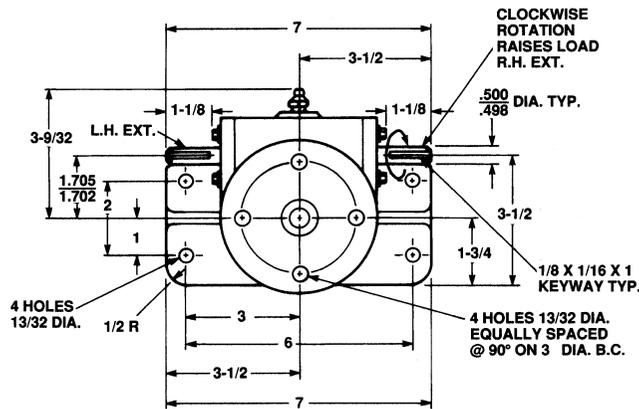


Upright: M-1802


1" Diameter x .250 Lead Lifting Screws

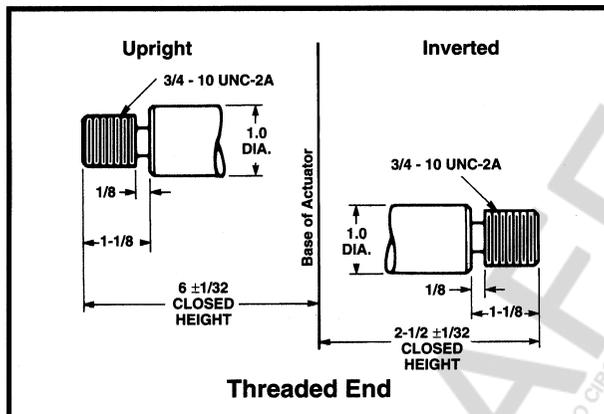


Threaded End

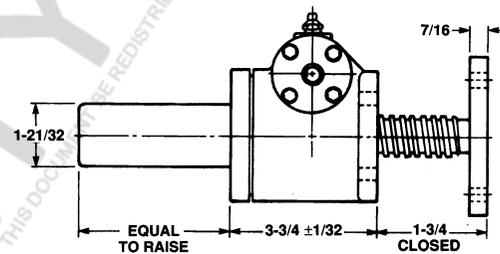


Inverted: M-1801

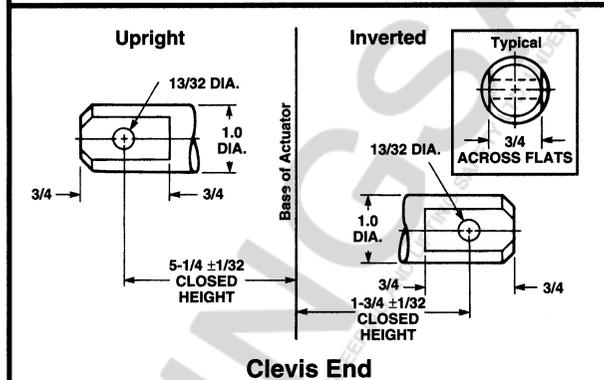

Clevis End

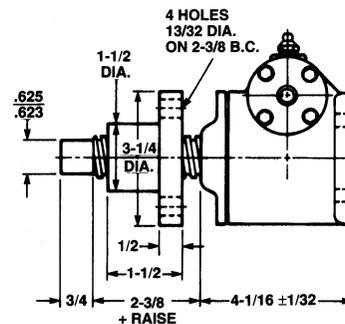


Upright Rotating: UM-1803

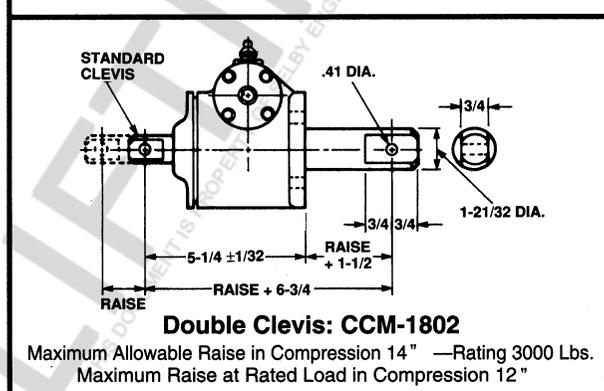

Double Clevis: CCM-1802

Maximum Allowable Raise in Compression 14" —Rating 3000 Lbs.
Maximum Raise at Rated Load in Compression 12"

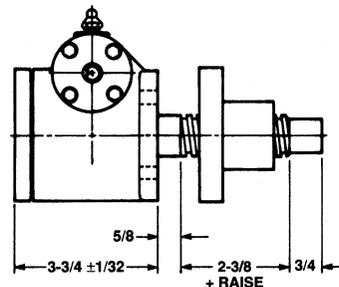

Inverted Rotating: DM-1803

Note: Lifting screw is not keyed. Top should be secured to a lifting member to prevent rotation. When a Bellows Boot is required, see pages 143-144. Dimensions are subject to change without notice.