




**SELBY ENGINEERING & LIFTING SAFETY LTD.**

*Lifting Equipment and Height Safety Specialists*

[www.liftingsafety.co.uk](http://www.liftingsafety.co.uk) [sales@liftingsafety.co.uk](mailto:sales@liftingsafety.co.uk)

Tel: +44 (0) 1977 684 600 Fax: +44 (0) 1977 685 300

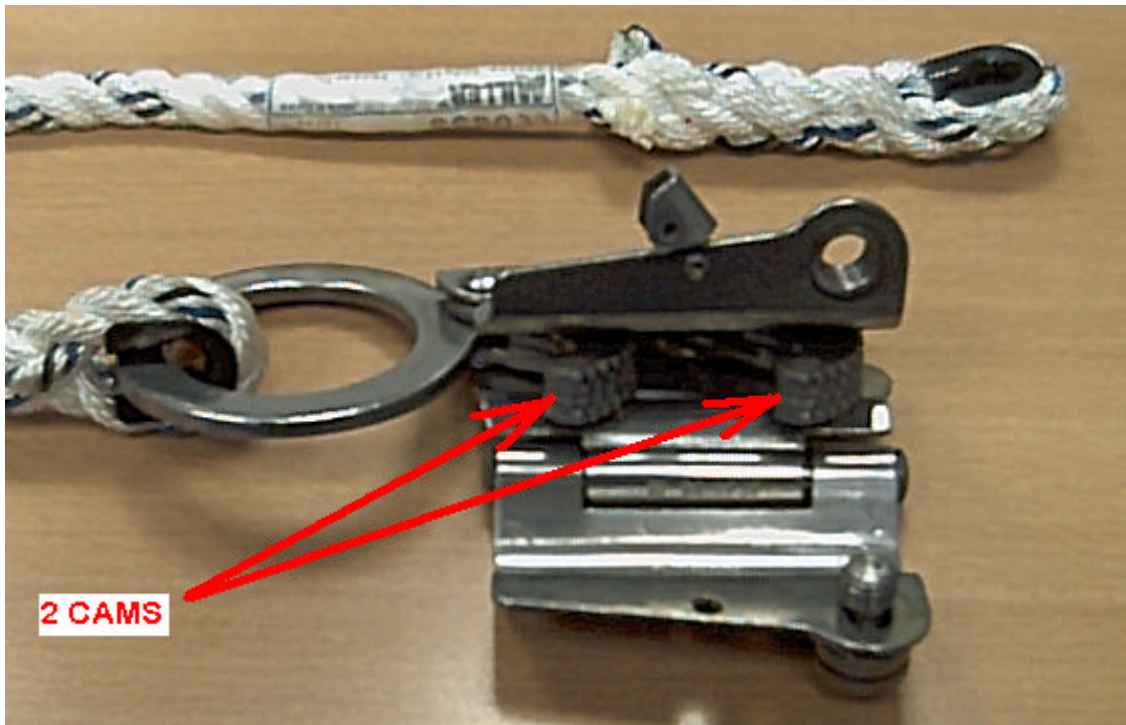

# Manual Rope Grab

## Technical Specifications

Product: MF50  
Reference: 9874MF50

## Main Features

### Components

#### **Rope grab:**

Raw material: Stainless steel

#### **Lanyard:**

Length with carabiner: 0.70 m

Raw material: Ø12mm Polyamide

Standard: EN 696

Breaking strength: > 2500 daN

#### **Carabiner ML00:**

Raw material: Galvanised steel

Standard: EN 362

Breaking strength: > 2200 daN

### Weight

MF50: 1.033 kg

### Anchorage line

#### **Flexible anchorage line:**

Ø14mm 3 strands polyamide rope with a spliced end and a plastic thimble

## Tests

### Static test

Breaking strength: MILLER anchorage line : > 22 KN

### Dynamic tests

Braking strength: < 6 KN

Arrest distance: < 3 m

Temperature: -30°C to +50°C

## Standards

### **EN 353-2: GUIDED TYPE FALL ARRESTERS ON A FLEXIBLE ANCHORAGE LINE**

Comply with the standard with MILLER anchorage line only

