

Crosby® / Bullard® Golden Gate® Hooks




SEE APPLICATION AND WARNING INFORMATION

Para Español: www.thecrosbygroup.com On Pages 124 - 125

LINK CHAIN NEST



- With ball bearing swivel; attaches to chain by an alloy pin.
 - BL-O - with Self-Closing Gate
 - BL-P - with Manual Closing Gate
- Suitable for frequent rotation under load.
- Use in corrosive environment requires shank and nut inspection in accordance with ASME B30.10-1.2.1(b)(2)(c)2000.

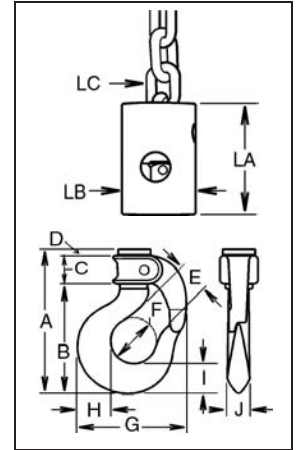

Hook & Swivels


Hook Size	BL-O Stock No.	BL-P Stock No.	Gate Type	Working Load Limit (Tons)*	Weight Each (lbs.)	Dimensions (in.)												
						A	B	C	D	E	F	G	H	I	J	LA	LB	LC
4:1/4-9/32	1051409	1051508	PIN-LOK	1.70	2.5	4.88	3.63	1.00	.22	1.06	1.50	3.63	1.16	1.00	.75	2.65	1.75	1/4-9/32
5:5/16-3/8	1051442	1051541	ROLLOX	2.30	4.5	5.53	4.12	1.23	.25	1.25	1.64	4.10	1.31	1.12	.84	3.00	2.25	5/16-3/8
7:3/8-7/16	1051464	1051563	ROLLOX	4.20	11.0	6.61	5.21	1.12	.25	1.50	2.00	4.94	1.63	1.44	1.13	4.38	3.00	3/8-9/16
7:1/2-9/16	1051486	1051585	ROLLOX	4.20	11.0	6.61	5.21	1.12	.25	1.50	2.00	4.94	1.63	1.44	1.13	4.38	3.00	3/8-9/16

* Ultimate Load is 4 times the Working Load Limit.

ROLLER CHAIN NEST



- Attachment with ball-bearing swivel and full-floating connector.
 - BL-S - with Self-Closing Gate
 - BL-R - with Manual Closing Gate
- Suitable for frequent rotation under load.
- Use in corrosive environment requires shank and nut inspection in accordance with ASME B30.10-1.2.1(b)(2)(c)2000.



Hook Size	BL-S Stock No.	BL-R Stock No.	Gate Type	Working Load Limit (Tons)*	Weight Each (lbs.)	Dimensions (in.)												
						A	B	C	D	E	F	G	H	I	J	RA	RB	RC
4 :#50	1051310	1051200	PIN-LOK	.75	2.9	4.88	3.63	1.00	.22	1.13	1.50	3.63	1.16	1.00	.75	3.52	1.75	5/8
5 :#60	1051321	1051211	ROLLOX	1.25	5.2	5.53	4.12	1.23	.25	1.25	1.64	4.09	1.31	1.12	.84	4.27	2.13	3/4
6 :#60	1051332	1051222	ROLLOX	1.25	6.2	6.23	4.70	1.25	.25	1.39	1.64	4.56	1.57	1.34	.97	4.27	2.13	3/4

* Ultimate Load is 4 times the Working Load Limit.

SELBY ENGINEERING & LIFTING SAFETY LTD.
 Lifting Equipment and Height Safety Specialists
www.liftingsafety.co.uk sales@liftingsafety.co.uk
 Tel: +44 (0) 1977 684 600 Fax: +44 (0) 1977 685 300