


McKissick® Sheaves

"A" Nominal Outside Diameter (in.)*	Stock No.	Pattern Number	Wire Line Size (in.)	"D" Shaft Size (in.)	Hub Width (in.)	Rim Width (in.)	"C" Nominal Hub Outside Dia. (in.)	"B" Nominal Tread Dia. (in.)	Material	Approx. Weight (lbs.)
30	4105426	48T8-B	7/8	5-3/4	3-3/8	3-1/8	8	27	R.F.	203.00
30	4101215	48T8-B	7/8	6	3-1/2	3-1/8	8	27	R.F.	140.00
30	4105435	48T8-B	1	5-3/4	3-3/8	3-1/8	8	27	R.F.	203.00
30	4105453	48T8-B	1	7	3-1/2	3-1/8	9-1/2	27	R.F.	211.00
30	4105444	48T8-B	1-1/8	5-3/4	3-3/8	3-1/8	8	27	R.F.	203.00
30	4105462	48T8-B	1-1/8	7	3-1/2	3-1/8	9-1/2	26-3/8	R.F.	211.00
30	4105471	48T8-B	1-1/4	7	3-1/2	3-1/8	9-1/2	26-3/8	R.F.	211.00

* Self Lubricating Bronze Bushing

** Without Flame Hardening.

Material: B.S.=Bar Steel, C.I.=Cast Iron, F.S.=Forged Steel, D.I.=Ductile Iron, C.S.=Cast Steel, P.M.=Powdered Metal, R.F.=Roll Forged.

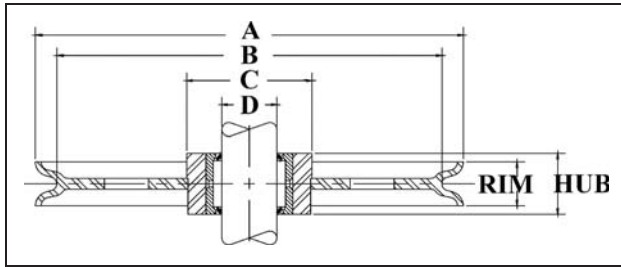

SEE APPLICATION AND WARNING INFORMATION

Para Español: www.thecrosbygroup.com See Pages 342-349

Roller Bearing Sheaves

- Roll Forged™ sheaves are available in sizes up to 72" in diameter.
- McKissick® Roller Bearing Sheaves are designed to operate on shafts carburized to 60 Rockwell "C" and ground to +/- .0005 of the indicated shaft size. Some sizes are available with an optional inner race. Check with Crosby Sales for prices and correct shaft size.
- Application should provide for 1/32" running clearance over the hub width.
- For sizes not listed, McKissick® Finished Bore Sheaves can be equipped with Roller Bearings at an optional charge.

"A" Nominal Outside Diameter (in.)*	Stock No.	Pattern Number	Wire Line Size (in.)	"D" Shaft Size (in.)	Hub Width (in.)	Rim Width (in.)	"C" Nominal Hub Outside Dia. (in.)	"B" Nominal Tread Dia. (in.)	Material	Approx. Weight (lbs.)
4	472508	4-1	1/8	.997	1	7/8	2	3-1/8	B.S.	2.00
4	472517	4-1	1/4	.997	1	7/8	2	3-1/8	B.S.	2.00
4	472535	4-1	3/8	.997	1	7/8	2	3-1/8	B.S.	2.00
-	-	-	-	-	-	-	-	-	-	-
4	2025893	4-K	3/8	.997	1-1/2	1-3/8	2	3	F.S.	3.50
4	2028063	4-K	1/2	.997	1-1/2	1-3/8	2	3	F.S.	3.50
4	2025891	4-K	5/8	.997	1-1/2	1-3/8	2	3	F.S.	3.50
-	-	-	-	-	-	-	-	-	-	-
4-7/8	472768	5-1-B	3/8	1.247	1-1/4	1-1/8	2-1/4	4-1/16	F.S.	3.60
4-7/8	472777	5-1-B	1/2	1.247	1-1/4	1-1/8	2-1/4	4-1/16	F.S.	3.60
4-7/8	472786	5-1-B	5/8	1.247	1-1/4	1-1/8	2-1/4	4-1/16	F.S.	3.60
-	-	-	-	-	-	-	-	-	-	-
5-1/4	2026427	6-6	5/8	.997	1-1/2	1-3/8	2-1/16	3-7/8	F.S.	4.00
5-1/4	2026423	6-6	3/4	.997	1-1/2	1-3/8	2-1/16	3-7/8	F.S.	4.00
-	-	-	-	-	-	-	-	-	-	-
5-7/8	2023141	6-2	5/8	1.497	1-3/4	1-5/8	2-1/2	4-3/8	F.S.	6.00
5-7/8	2023143	6-2	3/4	1.497	1-3/4	1-5/8	2-1/2	4-3/8	F.S.	6.00
5-7/8	2023142	6-2	7/8	1.497	1-3/4	1-5/8	2-1/2	4-3/8	F.S.	6.00
-	-	-	-	-	-	-	-	-	-	-
6	472875	6-8	1/2	1.997	1-3/4	1-1/4	3-1/8	4-3/4	F.S.	7.00
-	-	-	-	-	-	-	-	-	-	-
7-1/2	2025898	8-7	5/8	.997	1-1/2	1-3/8	2-1/16	6-5/16	F.S.	7.50
7-1/2	2025892	8-7	3/4	.997	1-1/2	1-3/8	2-1/16	6-5/16	F.S.	7.50
-	-	-	-	-	-	-	-	-	-	-

McKissick® Sheaves

"A" Nominal Outside Diameter (in.)*	Stock No.	Pattern Number	Wire Line Size (in.)	"D" Shaft Size (in.)	Hub Width (in.)	Rim Width (in.)	"C" Nominal Hub Outside Dia. (in.)	"B" Nominal Tread Dia. (in.)	Material	Approx. Weight (lbs.)
7-5/8	473311	8-10	3/8	.997	1-1/2	1-1/4	2-3/8	6-3/16	D.I.	7.00
7-5/8	473320	8-10	1/2	.997	1-1/2	1-1/4	2-3/8	6-3/16	D.I.	7.00
7-5/8	473339	8-10	5/8	.997	1-1/2	1-1/4	2-3/8	6-3/16	D.I.	7.00
-	-	-	-	-	-	-	-	-	-	-
8	2023163	8-2	3/4	1.497	1-3/4	1-5/8	2-9/16	6-5/16	F.S.	10.00
8	2023155	8-2	1/2	1.497	1-3/4	1-5/8	2-9/16	6-5/16	F.S.	10.00
8	2023159	8-2	5/8	1.497	1-3/4	1-5/8	2-9/16	6-5/16	F.S.	10.00
8	2023404	8NS-2	3/4	1.997	2-5/16	2-1/8	3-1/4	6-1/8	F.S.	12.50
-	-	-	-	-	-	-	-	-	-	-
9-7/8	2026433	10-2	1/2	1.497	1-3/4	1-5/8	2-9/16	8-5/16	F.S.	14.50
9-7/8	2023179	10-2	5/8	1.497	1-3/4	1-5/8	2-9/16	8-5/16	F.S.	14.50
9-7/8	2023181	10-2	3/4	1.497	1-3/4	1-5/8	2-9/16	8-5/16	F.S.	14.50
9-7/8	2023436	10NS-2	3/4	1.997	2-5/16	2-3/16	3-1/2	8-1/8	F.S.	15.00
-	-	-	-	-	-	-	-	-	-	-
12	2023248	12-1	5/8	1.497	1-3/4	1-5/8	3-1/4	10-1/8	F.S.	18.00
12	2023236	12-1	3/4	1.497	1-3/4	1-5/8	3-1/4	9-3/4	F.S.	18.00
12	2026441	12-1	7/8	1.497	1-3/4	1-5/8	3-1/4	10-1/4	F.S.	18.00
12	474365	12-9	5/8	2.247	1-3/4	1-5/8	4-1/2	10-1/8	R.F.	16.00
12	474374	12-9	3/4	2.247	1-3/4	1-5/8	4-1/2	9-3/4	R.F.	16.00
-	-	-	-	-	-	-	-	-	-	-
14	2026445	14-1	5/8	1.497	1-3/4	1-5/8	3-1/4	12	R.F.	20.00
14	2026444	14-1	3/4	1.497	1-3/4	1-5/8	3-1/4	11-3/4	R.F.	20.00
14	474784	14-1	7/8	1.497	1-3/4	1-5/8	3-1/4	12-1/4	R.F.	20.00
14	4200563	14-2	5/8	1.997	1-3/4	1-5/8	4-1/2	12-1/8	R.F.	31.00
14	4200572	14-2	3/4	1.997	1-3/4	1-5/8	4-1/2	11-3/4	R.F.	31.00
-	-	-	-	-	-	-	-	-	-	-
16	4200705	16-5B	7/8	2.497	2-5/16	2-3/16	4-1/2	12-15/16	R.F.	48.00
-	-	-	-	-	-	-	-	-	-	-
18	4201438	18-2	7/8	2.747	2-5/16	2-3/16	5-1/2	14-15/16	R.F.	42.70
18	4200867	18-2	1	2.747	2-5/16	2-3/16	5-1/2	14-7/8	R.F.	66.00
-	-	-	-	-	-	-	-	-	-	-
20	4200929	20-2	1	2.997	2-5/16	2-3/16	5-1/2	16-1/2	R.F.	77.00
-	-	-	-	-	-	-	-	-	-	-
24	4200117	24-1A	1	2.247	2-1/2	2-3/8	5-1/2	21-1/8	R.F.	75.00

* Without Flame Hardening.

Material: B.S.=Bar Steel, C.I.=Cast Iron, F.S.=Forged Steel, D.I.=Ductile Iron, C.S.=Cast Steel, P.M.=Powdered Metal, R.F.=Roll Forged.

McKissick
Sheaves