


# McKissick® Sheaves

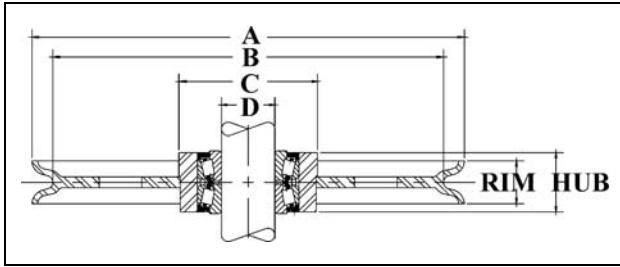

**SEE APPLICATION AND WARNING INFORMATION**  
 Para Español: [www.thecrosbygroup.com](http://www.thecrosbygroup.com) See Pages 342-349

**SELBY ENGINEERING & LIFTING SAFETY LTD.**  
 Lifting Equipment and Height Safety Specialists  
[www.liftingsafety.co.uk](http://www.liftingsafety.co.uk) sales@liftingsafety.co.uk  
 Tel: +44 (0) 1977 684 600 Fax: +44 (0) 1977 685 300

## Tapered Bearing Sheaves

- Roll Forged™ sheaves are available in sizes up to 72" in diameter.
- McKissick® Tapered Bearing Sheaves are designed to operate on shafts machined to + /- .0005 of the indicated shaft size. Applications should provide for tightening separator plates against bearing cones to adjust and insure proper function of bearing. For sizes not listed, McKissick® Finished Bore Sheaves can be equipped with tapered bearing at an optional charge.

"A" Nominal Outside Diameter (in.)*	Stock No.	Pattern Number	Wire Line Size (in.)	"D" Shaft Size (in.)	Hub Width (in.)	Rim Width (in.)	"C" Nominal Hub Outside Dia. (in.)	"B" Nominal Tread Dia. (in.)	Material	Approx. Weight (lbs.)
4-7/8	480269	5-1	3/8	.749	1-3/8	1-1/8	2-1/4	4-1/16	F.S.	3.6
-	-	-	-	-	-	-	-	-	-	-
7	480777	7-1	1/4	.749	1-3/8	3/4	2-3/8	6-1/4	B.S.	9.0
-	-	-	-	-	-	-	-	-	-	-
8	481017	8-2	1/2	.749	1-3/8	1-1/4	2-7/16	6-5/8	F.S.	7.0
-	-	-	-	-	-	-	-	-	-	-
8-1/2	481044	8DI-8	3/8	.749	1-3/8	1	2-3/4	7-1/2	D.I.	7.5
-	-	-	-	-	-	-	-	-	-	-
9-3/4	481295	10-NS-3	3/8	1.499	2-5/16	1	3-3/4	8-3/4	F.S.	11.2
-	-	-	-	-	-	-	-	-	-	-
11-7/8	481552	12-6	1/4	1.499	2-5/16	1	3-3/4	10-3/4	D.I.	12.0
-	-	-	-	-	-	-	-	-	-	-
12	481455	12-2-A	3/4	1.499	2-5/16	2-3/16	4-1/2	9-3/4	R.F.	24.0
12	481446	12-2-A	7/8	1.499	2-5/16	2-3/16	4-1/2	10-1/4	R.F.	24.0
-	-	-	-	-	-	-	-	-	-	-
16	4302793	16-4	1/2	1.998	2-15/16	2-1/2	5-3/4	14-1/4	R.F.	50.0
16	4300599	16-4	3/4	1.998	2-15/16	2-1/2	5-3/4	13-3/8	R.F.	55.0
16	4300018	16-5	7/8	1.499	2-5/16	2-3/16	4-1/2	12-15/16	R.F.	37.0
16	4300054	16-17-B	1	1.998	2-15/16	2-1/2	5-3/4	13-3/8	R.F.	42.0
-	-	-	-	-	-	-	-	-	-	-
18	4300081	18-2	3/4	1.998	2-15/16	2-3/16	6-1/2	16	R.F.	40.0
-	-	-	-	-	-	-	-	-	-	-
20	**4302524	20-5	5/16	1.998	2-15/16	1-3/8	5-3/4	18-7/8	R.F.	54.0
20	4300161	20-2	3/4	1.998	2-15/16	2-1/8	6-1/2	18	R.F.	87.0
20	4300189	20-2	1	1.998	2-15/16	2-1/8	6-1/2	16-1/2	R.F.	84.0
-	-	-	-	-	-	-	-	-	-	-
24	4301721	24TS-8	9/16	4.248	3-1/2	3-1/8	8	22	R.F.	125.0
24	**4302720	24-5	5/8	2.755	2-15/16	1-1/2	6-1/2	21-3/4	R.F.	136.0
24	4300312	24TS-8	7/8	4.248	3-1/2	3-1/8	8	20-7/8	R.F.	125.0
24	4300321	24TS-8	1	4.248	3-1/2	3-1/8	7-5/8	21-1/8	R.F.	125.0
24	4300401	24TS8-2	1-1/8	2.755	2-15/16	2-3/4	6-1/2	20-1/16	R.F.	80.0
24	4300330	24TS-8	1-1/8	4.248	3-1/2	3-1/8	8	20-1/16	R.F.	125.0
24	4300269	24-10	1-1/2	4.248	3-1/2	3-1/8	8-1/4	20	R.F.	125.0
-	-	-	-	-	-	-	-	-	-	-
30	4300483	48T8-B	7/8	4.248	3-1/2	3-1/8	8	27	R.F.	140.0
30	4300492	48T8-B	1	4.248	3-1/2	3-1/8	7-5/8	27	R.F.	210.0
30	4300526	48T8-B	1	5.624	3-11/16	3-1/8	9-1/2	27	R.F.	190.0
30	4300508	48T8-B	1-1/8	4.248	3-1/2	3-1/8	8	27	R.F.	140.0
30	4300535	48T8-B	1-1/8	5.624	3-11/16	3-1/8	9-1/2	26-3/8	R.F.	140.0
30	4300704	48T8-B	1-1/4	5.624	3-11/16	3-1/8	9-1/2	26-3/8	R.F.	140.0

\* Without Flame Hardening.  
 Material: B.S.=Bar Steel, C.I.=Cast Iron, F.S.=Forged Steel, D.I.=Ductile Iron, C.S.=Cast Steel, P.M.=Powdered Metal, R.F.=Roll Forged.