

McKissick® Scrap Handling Blocks

SELBY ENGINEERING & LIFTING SAFETY LTD.
 Lifting Equipment and Height Safety Specialists
 www.liftingsafety.co.uk sales@liftingsafety.co.uk
 Tel: +44 (0) 1977 684 600 Fax: +44 (0) 1977 685 300

SEE APPLICATION AND WARNING INFORMATION
 Para Español: www.thecrosbygroup.com On Pages 342-349


381-SY



- All single point shank hooks are genuine Crosby®, forged alloy steel, Quenched and Tempered, and have the patented QUIC-CHECK® markings.
- Durable - Allows longer continuous duty cycle.
- Can be used with magnet and drop ball
- Single sheave design
- Dual action hook (Swings and Rotates)
- Utilize McKissick® Roll-Forged™ sheaves with flame hardened grooves.
- Furnished standard with Bronze Bushed Sheaves.
- Optional Tapered Roller Bearings.
- All sizes are **RFID EQUIPPED**



381-SY Scrap Handling Blocks

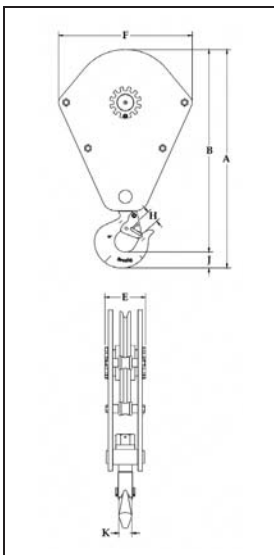

Model No.	381-SY Inquiry Stock No.	Working Load Limit (Tons)*	Sheave Diameter (in.)	Standard Wire Line (in.)	Weight Each (lbs.)	Dimensions (in.)						
						A	B	E	F	H	J	K
S15S16L	2014810	15	16	9/16, 5/8, 3/4, 7/8	285	37.16	34.19	6.34	22.75	2.75	2.97	2.38
S20S18L	2014812	20	18	5/8, 3/4, 7/8, 1	395	39.54	36.57	6.84	24.75	2.75	2.97	2.38
S25S20L	2014814	25	20	3/4, 7/8, 1, 1-1/8	460	42.16	39.19	6.84	26.75	2.75	2.97	2.38
S30S24L	2014816	30	24	7/8, 1, 1-1/8, 1-1/4	705	50.44	46.81	7.84	30.75	3.25	3.62	3.00
S40S24L	2014818	40	24	7/8, 1, 1-1/8, 1-1/4	815	55.81	50.75	7.84	30.75	3.38	5.06	3.25

* Ultimate Load is 4 times the Working Load Limit.