



# Yoke DAB Bolt On Swivel Lifting / Lashing Point - Range from 1000kg to 5000kg

## Yoke Bolt On Tie Down Lifting Point, Grade 8, EN1677-1

**Model:** DAB / BOTD-2826

**Manufacturing Standard:** EN1677-1

The Yoke Bolt down load ring is available in three different sizes and capacities 1, 3 and 5 tonne SWL. the load ring can be used for lifting equipment (not people) or as a lashing down anchorage point for cargo restraint purposes.


Yoke are a quality lifting equipment manufacturer and relatively new to the UK lifting market place though are probably equal in quality to any other manufacturer.



- Designed with spring, stop at any angle supplied without bolt
- Pivots 180° and allows side load lifting.
- Manufactured from forged alloy steel, quenched and tempered.
- Manufactured and tested in accordance with EN1677-1.
- Load rated parts are 100% magnaflux crack detected.
- Individual forged parts are traceable to Test Certification.
- Supplied without bolts; usage of Grade 10.9 or Grade 12.9 bolts is recommended.
- Proof tested to 2.5 times the WLL.
- Fatigue rated to 1.5 times the WLL.
- Design Factor 5 : 1
- All YOKE lifting points meet or exceed all the requirements of ASME B30.26.

### Usage Examples

- Designed to be semi-permanent lashing or lifting point
- Suitable for attachment to lifting beams and spreader beams

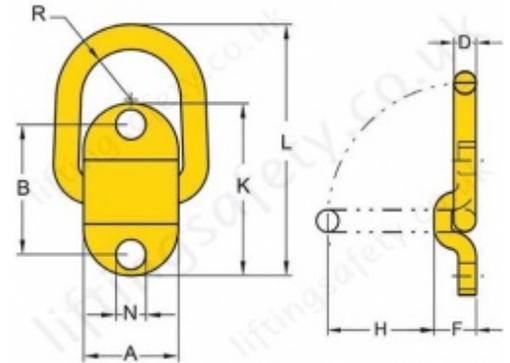

### Specifications

Part N°	WLL (tonnes)	A (mm)	B (mm)	D (mm)	F (mm)	K (mm)	H (mm)	N (mm)	L (mm)	R (mm)	Net Weight (Kg)
2826-T19071 8-058-1T	1.0	50	72	14	27	98	55	14	139	24	0.9
2826-T19072 8-058-3T	3.0	58	84	17	33	114	50	18	144	29	1.4
2826-T19073 8-058-5T	5.0	64	116	22	43	160	74	23	203	33	2.9

✉ sales@liftingsafety.co.uk ☎ +44 (0)1977 684 600