


High Gantry Crane Technical Specifications

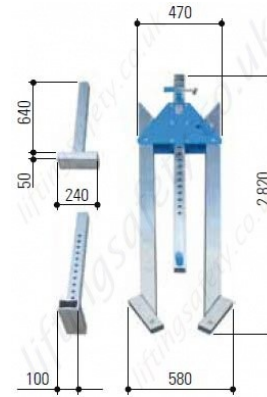

Dimensional specifications for the high aluminium gantry crane with collapsible lateral stands and fixed feet.

Item N°	Load capacity (kg)	Total height		Beam length		Suspension point at the bolt of the trolley		Lower edge alu-beam		Adjustment range		Lateral stand		Weight (kg)
		min. (mm)	max. (mm)	Clear width (mm)	Total (mm)	min. (mm)	max. (mm)	min. (mm)	max. (mm)	beam support (mm)	telescopic foot (mm)	width (mm)	height (mm)	
3085-T4893	1000	2700	4400	4000	4100	2320	4020	2410	4110	1300	400	2240	1970	149
3085-T4894	1000	2700	4400	5000	5100	2320	4020	2410	4110	1300	400	2240	1970	161
3085-T4895	1000	2700	4400	6000	6100	2320	4020	2390	4090	1300	400	2240	1970	175
3085-T4896	1000	2700	4400	7000	7100	2320	4020	2390	4090	1300	400	2240	1970	184
3085-T4897	1000	2700	4400	8000	8100	2320	4020	2390	4090	1300	400	2240	1970	225
3085-T4898	1500	2700	4400	4000	4100	2320	4020	2390	4090	1300	400	2240	1970	157
3085-T4899	1500	2700	4400	5000	5100	2320	4020	2390	4090	1300	400	2240	1970	186
3085-T4900	1500	2700	4400	6000	6100	2320	4020	2390	4090	1300	400	2240	1970	199

Component Weights and Dimensions

Item n°	Load capacity (kg)	Beam length (mm)	Beam support (mm)	Beam profile (mm)	Beam sleeve (mm)	Total weight (kg)	Aluminium beam (kg)	Lateral stand (kg)	Trolley (kg)	Horizontal adjuster (kg)
3085-T4893	1000	4000	71 x 71	200 x 50	82 x 82**	149	31	2 x 50	8	10
3085-T4894	1000	5000	71 x 71	200 x 50	82 x 82**	161	43	2 x 50	8	10
3085-T4895	1000	6000	71 x 71	220 x 60	82 x 82**	175	57	2 x 50	8	10
3085-T4896	1000	7000	71 x 71	220 x 60	82 x 82**	184	66	2 x 50	8	10
3085-T4897	1000	8000	71 x 71	220 x 60*	82 x 82**	225	107	2 x 50	8	10
3085-T4898	1500	4000	71 x 71	220 x 60	82 x 82**	157	39	2 x 50	8	10
3085-T4899	1500	5000	71 x 71	220 x 60*	82 x 82**	186	68	2 x 50	8	10
3085-T4900	1500	6000	71 x 71	220 x 60*	82 x 82**	199	81	2 x 50	8	10

* with larger profile thickness (inwards).

** 270mm long; other side: end piece