



**technical
sheet**

**TO
universal cable drum hooks**

ref. : **T 6032 GB**
 rev. : **2**
 date : **Jun. 03**
 page : **1/ 1**

Applications

Cable
drum
lifting.

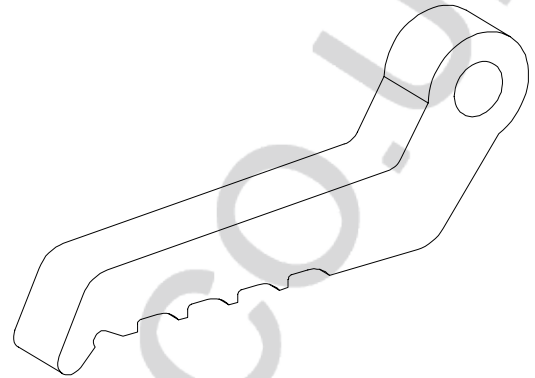

Description

These accessories are adapted to many cable drums*. They fit holes with diameters from 55 to 83 mm. Slings and shackles not provided.

* ABN/ BBN/ CBN/ DBN/ EBN/ FBN/ GBN/ HBN/ IBN type following NF B 55-007 French standard.

Functioning

Once both shackles and 2-legged cable/ chain/ textile slings have been put together with the hooks, insert them either side of the cable drum axle, teeth downwards. Lifting ensures the hooks' locking in position.

Particular instructions

- The hooks and cable drums' bearing surface must be free from grease or oil.
- Insert hooks in the right direction, ie. teeth downwards.
- Working temperature: -20° to +100°C.

General characteristics

- Manufacture without load bearing welds.
- Hot epoxy coating.
- Safety factor: 4 in accordance with the European Materials Handling Federation (1998 FEM 3rd edition) ; working group A5 and lifting speed 60 m/ mn.

Dimensional characteristics

Ref.	Group code	WLL kg	A	B	D	E	L	Weight/ pair kg
TO13	51198	13 000	265	112	27	35	180	6

Dimensions in mm

