

Crosby® Grade 100 SHUR-LOC® Hooks

Fatigue Rated

"QT"
QUENCHED & TEMPERED

QUIC-CHECK®

Crosby 8/10™



SEE APPLICATION AND WARNING INFORMATION

Para Español: www.thecrosbygroup.com

On Pages 242-243

S-1316




- Forged Alloy Steel - Quenched and Tempered.
- 25% stronger than Grade 80.
- Individually Proof Tested to 2-1/2 times the Working Load Limit with certification.
- Recessed trigger design is flush with the hook body, protecting the trigger from potential damage.
 - Easy to operate with enlarged thumb access.
- Positive Lock Latch is Self-Locking when hook is loaded.
- Eye style is designed with "Engineered Flat" to connect to S-1325 chain coupler.
- Suitable for use with Grade 100 and Grade 80 chain.
- The SHUR-LOC® hook, if properly installed and locked, can be used for personnel lifting applications and meets the intent of OSHA Rule 1926.550 (g) (4) (iv) (B).
- Fatigue rated at 1-1/2 times the Working Load Limit at 20,000 cycles.
- "Look for the Platinum Color - Crosby Grade 100 Alloy Products."

S-1317



SHUR-LOC® Hook Series with Positive Locking Latch


S-1316 Eye Hook

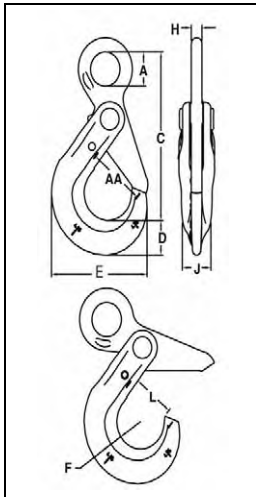

| Chain Size | | Working Load Limit (lbs.)* | S-1316 Stock No. | Weight Each (lbs.) | Dimensions (in.) | | | | | | |
|------------|-------|----------------------------|------------------|--------------------|------------------|-------|------|------|------|------|------|
| (in.) | (mm) | | | | A | C | D | E | J | L | AA |
| - | 6 | 3200 | 1022896 | .85 | .78 | 3.95 | .79 | 2.60 | .63 | 1.14 | 1.50 |
| 1/4-5/16 | 7-8 | 5700 | 1022914 | 1.80 | 1.08 | 5.31 | 1.10 | 3.50 | .81 | 1.48 | 2.00 |
| 3/8 | 10 | 8800 | 1022923 | 3.40 | 1.30 | 6.57 | 1.17 | 4.39 | .94 | 1.83 | 2.50 |
| 1/2 | 13 | 15000 | 1022932 | 6.00 | 1.65 | 8.23 | 1.67 | 5.45 | 1.16 | 2.22 | 3.00 |
| 5/8 | 16 | 22600 | 1022941 | 15.1 | 2.20 | 10.06 | 2.04 | 6.56 | 1.50 | 2.65 | 3.50 |
| 3/4 | 18-20 | 35300 | 1022942 | 19.0 | 2.60 | 10.77 | 2.22 | 7.76 | 2.03 | 3.52 | - |
| 7/8 | 22 | 42700 | 1022943 | 28.0 | 2.87 | 12.49 | 2.45 | 8.75 | 2.20 | 3.83 | - |
| 1 | 26 | 59700 | 1022944 | 49.5 | 3.15 | 14.60 | 3.21 | 9.87 | 2.68 | 4.09 | - |

* Minimum Ultimate Load is 4 times the Working Load Limit.

S-1317 Clevis Hook

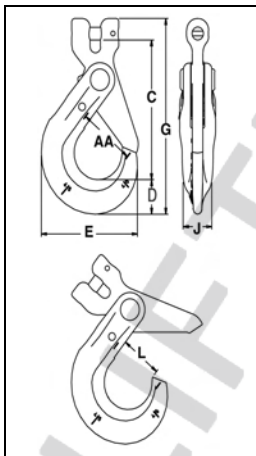

| Chain Size | | Working Load Limit (lbs.)* | S-1317 Stock No. | Weight Each (lbs.) | Dimensions (in.) | | | | | | |
|------------|-------|----------------------------|------------------|--------------------|------------------|------|------|-------|------|------|------|
| (in.) | (mm) | | | | C | D | E | G | J | L | AA |
| - | 6 | 3200 | 1028991 | .77 | 3.44 | .79 | 2.60 | 4.75 | .63 | 1.16 | 1.50 |
| 1/4 | 7 | 4300 | 1029000 | 1.80 | 4.48 | 1.10 | 3.51 | 6.25 | .81 | 1.48 | 2.00 |
| 5/16 | 8 | 5700 | 1029009 | 1.80 | 4.47 | 1.10 | 3.51 | 6.25 | .81 | 1.48 | 2.00 |
| 3/8 | 10 | 8800 | 1029018 | 3.66 | 5.53 | 1.17 | 4.39 | 7.54 | .94 | 1.83 | 2.50 |
| 1/2 | 13 | 15000 | 1029027 | 6.80 | 6.81 | 1.67 | 5.49 | 9.52 | 1.16 | 2.22 | 3.00 |
| 5/8 | 16 | 22600 | 1029036 | 11.9 | 8.22 | 2.04 | 6.55 | 11.61 | 1.50 | 2.65 | 3.50 |
| 3/4 | 18-20 | 35300 | 1029071 | 15.0 | 9.42 | 2.22 | 7.76 | 13.21 | 2.03 | 3.52 | - |
| 7/8 | 22 | 42700 | 1029080 | 28.0 | 11.14 | 2.45 | 8.75 | 15.45 | 2.20 | 3.83 | - |
| 1 | 26 | 59700 | 1029089 | 49.5 | 12.56 | 3.21 | 9.87 | 18.44 | 2.68 | 4.09 | - |

* Minimum Ultimate Load is 4 times the Working Load Limit.