

Crosby® Grade 100 SHUR-LOC® Hooks

Fatigue Rated

QT
QUENCHED & TEMPERED

QUIC-CHECK

Crosby 8/10™

SEE APPLICATION AND WARNING INFORMATION
Para Español: www.thecrosbygroup.com On Pages 234-235

S-1316




- Forged Alloy Steel - Quenched and Tempered.
- 25% stronger than Grade 80.
- Individually Proof Tested to 2-1/2 times the Working Load Limit with certification.
- Recessed trigger design is flush with the hook body, protecting the trigger from potential damage.
 - Easy to operate with enlarged thumb access.
- Meets the performance requirements of EN1677-3:2001
- Positive Lock Latch is Self-Locking when hook is loaded.
- Eye style is designed with "Engineered Flat" to connect to S-1325 chain coupler.
- Suitable for use with Grade 100 and Grade 80 chain.
- The SHUR-LOC® hook, if properly installed and locked, can be used for personnel lifting applications and meets the intent of OSHA Rule 1926.550 (g) (4) (iv) (B).
- Fatigue rated at 1-1/2 times the Working Load Limit at 20,000 cycles.
- "Look for the Platinum Color - Crosby Grade 100 Alloy Products."

S-1317



SHUR-LOC® Hook Series with Positive Locking Latch


S-1316 Eye Hook

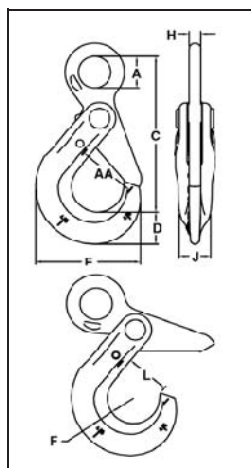

Chain Size		Working Load Limit (t)*	S-1316 Stock No.	Weight Each (kg)	Dimensions (mm)						
(in.)	(mm)				A	C	D	E	J	L	AA
-	6	1.45	1022896	.39	19.8	100	20.1	66.0	16.0	29.5	38.1
1/4-5/16	7-8	2.60	1022914	.82	27.4	135	27.9	88.9	20.6	37.6	51.0
3/8	10	4.00	1022923	1.54	33.0	167	29.7	112	23.9	56.1	63.5
1/2	13	6.80	1022932	2.72	41.9	209	42.4	139	29.5	56.4	76.2
5/8	16	10.30	1022941	6.85	55.9	256	51.8	167	38.1	67.3	89.0
3/4	18-20	16.00	1022942	8.62	66.0	274	56.4	197	51.6	89.4	-
7/8	22	19.40	1022943	12.7	72.9	317	62.2	222	55.9	97.3	-
1	26	27.10	1022944	22.5	80.0	371	81.5	251	68.1	104	-

* Minimum Ultimate Load is 4 times the Working Load Limit.

S-1317 Clevis Hook

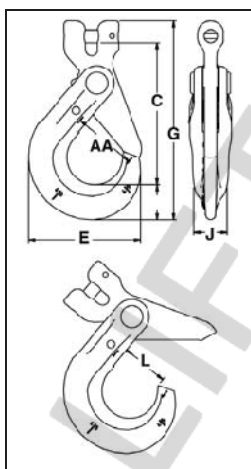

Chain Size		Working Load Limit (t)*	S-1317 Stock No.	Weight Each (kg)	Dimensions (mm)						
(in.)	(mm)				C	D	E	G	J	L	AA
-	6	1.40	1028991	.35	87.4	20.1	66.0	121	16.0	29.0	38.1
1/4	7	2.00	1029000	.82	114	27.9	89.0	159	20.6	35.1	51.0
5/16	8	2.60	1029009	.82	114	27.9	89.0	159	20.6	35.1	51.0
3/8	10	4.00	1029018	1.66	140	29.7	112	192	24.1	46.5	63.5
1/2	13	6.80	1029027	3.08	173	42.4	139	242	29.5	56.4	76.2
5/8	16	10.30	1029036	5.40	209	51.8	167	295	38.1	67.3	89.0
3/4	18-20	16.00	1029071	6.80	239	56.4	197	336	51.6	89.4	-
7/8	22	19.40	1029080	12.7	283	62.2	222	392	55.9	97.3	-
1	26	27.10	1029089	22.5	319	81.5	251	468	68.1	104	-

* Minimum Ultimate Load is 4 times the Working Load Limit.