

SELBY ENGINEERING AND LIFTING SAFETY LTD
TEL: +44 (0)1977 684 600



FALL ARREST BLOCKS

Xcalibre

SAFETY BY DESIGN



LIFTINGSAFETY.CO.UK

SELBY ENGINEERING AND LIFTING SAFETY LTD. TEL: +44 (0) 1977 684 600

Xcalibre

SAFETY BY DESIGN



Introducing the next generation of fall arrest blocks – the **Xcalibre** family from RidgeGear.

Packed with unrivalled technology, super light and finished with a sleek, compact and contemporary design, there is an **Xcalibre** block that will meet and exceed your expectations.



The **RGAX3w** is the ultimate answer in safety when working at low levels due to its unique rapid breaking system (RBS).

The most diverse block of its kind, it is ideal for working in the construction, off shore, port safety and rigging industries.

Product features

Materials

Composite mouldings UV stabilised, carbon steel black zinc plated, anodised aluminium, stainless steel

Capacity/Weights

3m webbing/1.1kg (including swivel hook)

Dimensions

150mm x 80mm x 80mm excluding karabiners


Arrest Force/Distance

Webbing 4.0kN/<300mm

Connectors/Karabiners

Supplied with alloy swivel load indicator twist lock karabiner on life-line and 11mm alloy twist lock device

EN 360, AS/NZS 1891.3.1.1997, and ANSI

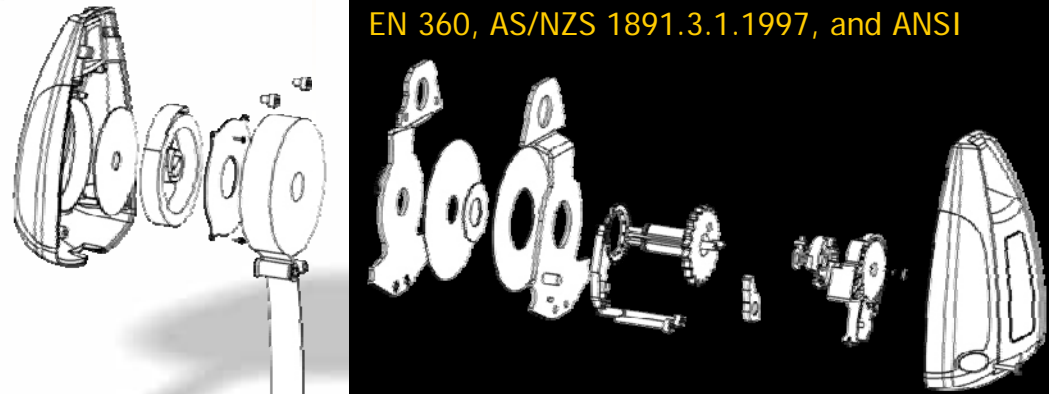

RGAX_{3w}

Xcalibre
SAFETY BY DESIGN



8m Webbing

10m Wire rope

10m Dyneema rope

RGAX10 series

Product features

Materials

Composite mouldings UV stabilised, carbon steel black zinc plated, anodised aluminium, stainless steel

Capacity/Weights

8m webbing (3.4kg), 10m Dyneema rope (3.75kg) and 10m wire rope – options of galvanised or stainless (4.10kg)

Dimensions

244mm x 183mm x 144mm excluding karabiners

Arrest Force/Distance

Webbing 3.2kN, Dyneema 3.0kN, Wire rope 3.5kN - <2m

Connectors/Karabiners

Supplied with alloy swivel load indicator twist lock karabiner on life-line and 11mm alloy twist lock device



12m Webbing

18m Wire rope

18m Dyneema rope

RGAX18 series

Product features

Materials

Composite mouldings UV stabilised, carbon steel black zinc plated, anodised aluminium, stainless steel

Capacity/Weights

12m webbing (4.5kg), 18m Dyneema rope (5.5kg) and 18m wire rope – options of galvanised or stainless (6.5kg)

Dimensions

300mm x 226mm x 144mm excluding karabiners

Arrest Force/Distance

Webbing 4.0kN, Dyneema 3.5kN, Wire rope 4.5kN - <2m

Connectors/Karabiners

Supplied with alloy swivel load indicator twist lock karabiner on life-line and 11mm alloy twist lock device

EN 360, AS/NZS 1891.3.1.1997, and ANSI

Patent No.

2453021B, 2451835B

Community Design No.

0007771258-0001

Patent pending No.

0814563.3 & 0814564.1