

SELBY ENGINEERING AND LIFTING SAFETY LTD  
TEL: +44 (0)1977 684 600



# FALL ARREST BLOCKS

# Xcalibre

SAFETY BY DESIGN



LIFTINGSAFETY.CO.UK

SELBY ENGINEERING AND LIFTING SAFETY LTD. TEL: +44 (0) 1977 684 600

# Xcalibre

SAFETY BY DESIGN



Introducing the next generation of fall arrest blocks – the **Xcalibre** family from RidgeGear.

Packed with unrivalled technology, super light and finished with a sleek, compact and contemporary design, there is an **Xcalibre** block that will meet and exceed your expectations.



The **RGAX3w** is the ultimate answer in safety when working at low levels due to it's unique rapid breaking system (RBS).

The most diverse block if its kind, it is ideal for working in the construction, off shore, port safety and rigging industries.

## Product features

### Materials

Composite mouldings UV stabilised, carbon steel black zinc plated, anodised aluminium, stainless steel

### Capacity/Weights

3m webbing/1.1kg (including swivel hook)

### Dimensions

150mm x 80mm x 80mm excluding karabiners


### Arrest Force/Distance

Webbing 4.0kN/<300mm

### Connectors/Karabiners

Supplied with alloy swivel load indicator twist lock karabiner on life-line and 11mm alloy twist lock device

EN 360, AS/NZS 1891.3.1.1997, and ANSI

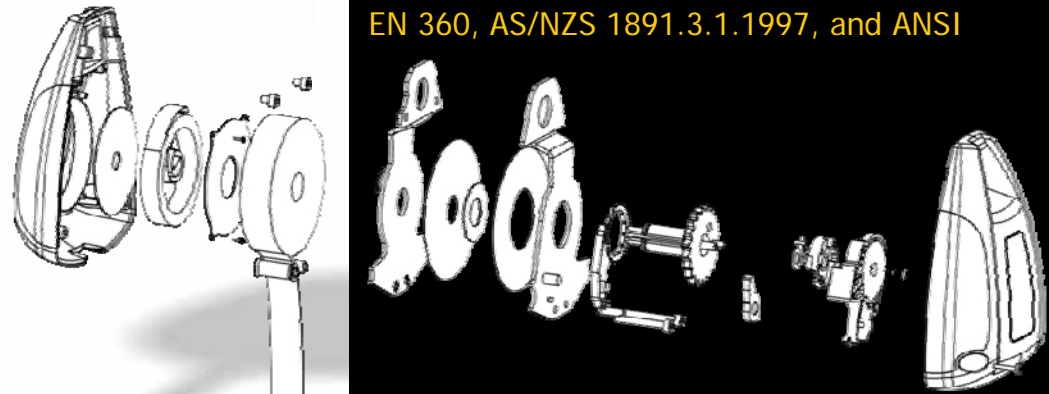

# RGAX<sub>3w</sub>

SELBY ENGINEERING AND LIFTING SAFETY LTD. TEL: +44 (0) 1977 684 600

# Xcalibre

SAFETY BY DESIGN



- 8m Webbing
- 10m Wire rope
- 10m Dyneema rope

## RGAX10 series

### Product features

#### Materials

Composite mouldings UV stabilised, carbon steel black zinc plated, anodised aluminium, stainless steel

#### Capacity/Weights

8m webbing (3.4kg), 10m Dyneema rope (3.75kg) and 10m wire rope – options of galvanised or stainless (4.10kg)

#### Dimensions

244mm x 183mm x 144mm excluding karabiners

#### Arrest Force/Distance

Webbing 3.2kN, Dyneema 3.0kN, Wire rope 3.5kN - <2m

#### Connectors/Karabiners

Supplied with alloy swivel load indicator twist lock karabiner on life-line and 11mm alloy twist lock device



- 12m Webbing
- 18m Wire rope
- 18m Dyneema rope

## RGAX18 series

### Product features

#### Materials

Composite mouldings UV stabilised, carbon steel black zinc plated, anodised aluminium, stainless steel

#### Capacity/Weights

12m webbing (4.5kg), 18m Dyneema rope (5.5kg) and 18m wire rope – options of galvanised or stainless (6.5kg)

#### Dimensions

300mm x 226mm x 144mm excluding karabiners

#### Arrest Force/Distance

Webbing 4.0kN, Dyneema 3.5kN, Wire rope 4.5kN - <2m

#### Connectors/Karabiners

Supplied with alloy swivel load indicator twist lock karabiner on life-line and 11mm alloy twist lock device

EN 360, AS/NZS 1891.3.1.1997, and ANSI

Patent No. 2453021B, 2451835B  
 Community Design No. 0007771258-0001  
 Patent pending No. 0814563.3 & 0814564.1