



**SELBY ENGINEERING & LIFTING SAFETY LTD.**

Lifting Equipment and Height Safety Specialists

www.liftingsafety.co.uk sales@liftingsafety.co.uk

Tel: +44 (0) 1977 684 600 Fax: +44 (0) 1977 685 300


# Shock-Absorbing Lanyard

## Technical Specifications

**Product:** ME83- Miller™ Manyard™ Stretchable Shock-Absorbing Lanyard equipped with one carabiner and one snap hook

**Reference:**

|         |       |       |        |          |
|---------|-------|-------|--------|----------|
| 1005326 | 1.5 m | 32,8% | 1,05 m | 0,650kg  |
| 1005327 | 2.0 m | 30,7% | 1,35 m | 0,735 kg |

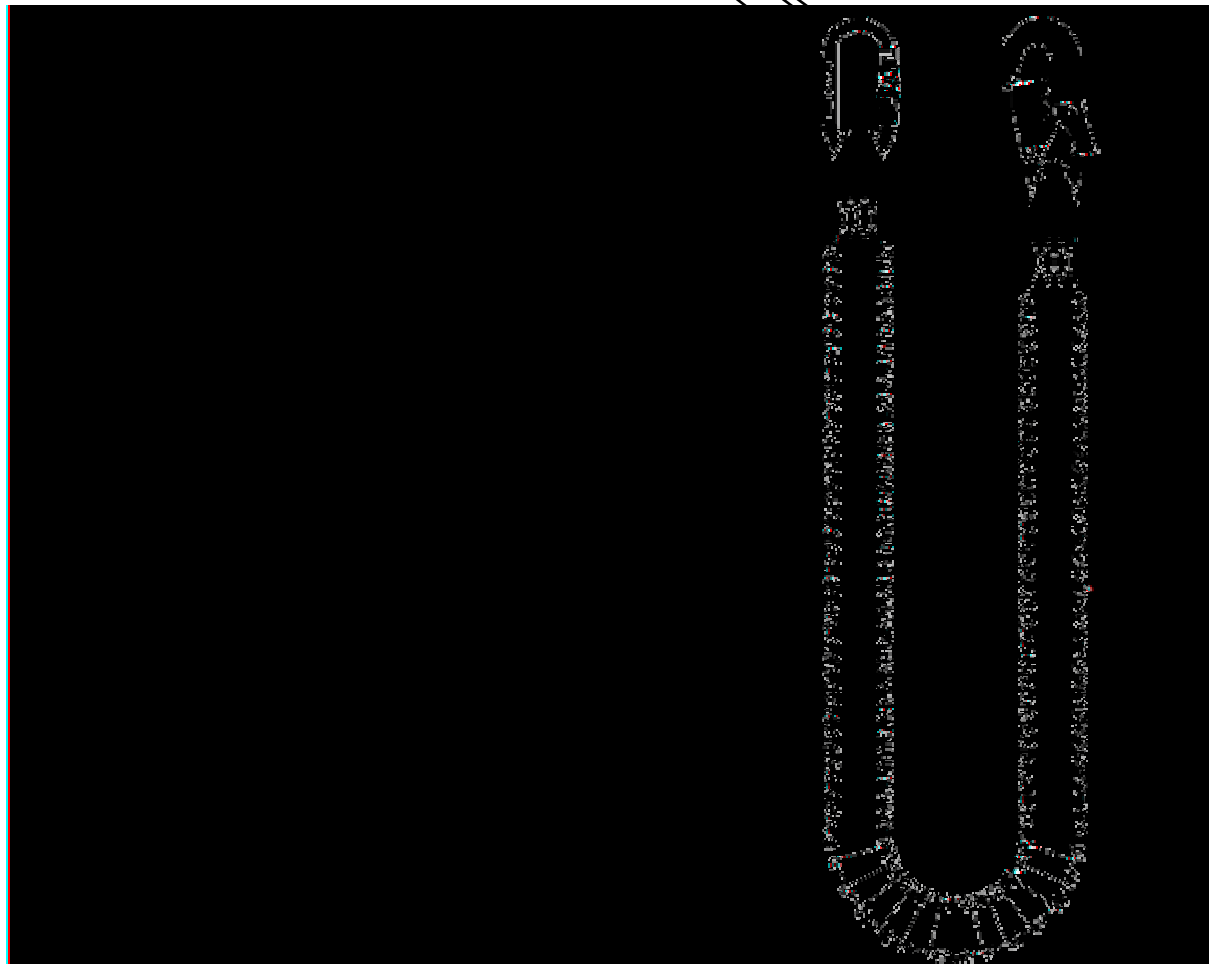

Standards

EN 355

# ME82 - MANYARD SHOCK ABSORBING LANYARD - 1.5M - 2 ML00

## Product use

1.5m Shock absorbing Lanyard - complete with 2 galvanised connectors (ML00), with TEFLON® finish

Added elasticity 32%  
Integrated shock absorber  
Highly resistant external webbing, Teflon finish  
Warning flag  
2 Screw karabiners  
Security Clip

## Technical description

Elasticity : 29.7 %  
Length Folded : 1.05m

Integrated shock absorber  
Polyester fibers  
Impact strength reduction: > 500 daN

**External highly resistant webbing:**  
Polyamide webbing 45mm - green  
Teflon finish  
Breaking strength: > 2500 daN

**Screwgate karabiners ML00**  
Galvanized steel  
Standard: EN 362  
Opening: 18 mm  
Breaking strength: > 2200 daN

**Weight :** 0.620 Kg

Breaking strength: > 15 KN  
Temperature: -30°C to +50°C

## Additional information

TEFLON® is a registered trademark of DuPont for its brand of fabric protector.  
Only DuPont makes TEFLON®.



[click address to go to...](#)

# ME82 - MANYARD SHOCK ABSORBING LANYARD - 1.5M - 2 ML00

The supplier or its legal representative supplier settled in the European community :

**MILLER**

declares that the new Individual Protection Equipment described hereafter :

Designation :

**ME82 - Manyard Shock absorbing Lanyard - 1.5m - 2 ML00**

Article code :

**10 053 17**

is in conformity with Directive dispositions 89/686/CEE.

This PPE has been the object of the EC attestation type :

**0082/490/160/04/01/0089**

delivered by :

**ATTEX**

**Plaza de Emilio Sala 1**

**03801**

**ALCOY**

**Spain**

Identified by the number :

**161**

Made on the : **05/08/2004**

at : **Vierzon**

Division : **Fall Protection**

By : **Frederic GUICHARD**

[click address to go to...](#)

# ME82 - MANYARD SHOCK ABSORBING LANYARD - 2M - 2 ML00



## Product use

2m Shock absorbing Lanyard - complete with 2 galvanised connectors (ML00), with TEFLON® finish

Added elasticity 32%  
Integrated shock absorber  
Highly resistant external webbing, Teflon finish  
Warning flag  
2 Screw karabiners  
Security Clip

## Technical description

Elasticity : 32.5 %  
Length Folded : 1.35m

Integrated shock absorber  
Polyester fibers  
Impact strength reduction: > 500 daN

**External highly resistant webbing:**  
Polyamide webbing 45mm - green  
Teflon finish  
Breaking strength: > 2500 daN

**Screwgate karabiners ML00**  
Galvanized steel  
Standard: EN 362  
Opening: 18 mm  
Breaking strength: > 2200 daN

**Weight :** 0.675 Kg

Breaking strength: > 15 KN  
Temperature: -30°C to +50°C

## Additional information

TEFLON® is a registered trademark of DuPont for its brand of fabric protector.  
Only DuPont makes TEFLON®.

[click address to go to....](#)

# ME82 - MANYARD SHOCK ABSORBING LANYARD - 2M - 2 ML00

The supplier or its legal representative supplier settled in the European community :

**MILLER**

declares that the new Individual Protection Equipment described hereafter :

Designation :

**ME82 - Manyard Shock absorbing Lanyard - 2m - 2 ML00**

Article code :

**10 053 18**

is in conformity with Directive dispositions 89/686/CEE.

This PPE has been the object of the EC attestation type :

**0082/490/160/04/01/0089**

delivered by :

**ATTEX**

**Plaza de Emilio Sala 1**

**03801**

**ALCOY**

**Spain**

Identified by the number :

**161**

Made on the : **05/08/2004**

at : **Vierzon**

Division : **Fall Protection**

By : **Frederic GUICHARD**

[click address to go to....](#)



## ME86 - MANYARD SHOCK ABSORBING LANYARD - 1.5M - ML00+ML04

### Product use

1.5m Shock absorbing Lanyard - complete with 1 screwgate karabiner (ML00) & Automatic Snap hook, with TEFLON® finish

Added elasticity 32%  
Integrated shock absorber  
Highly resistant external webbing, Teflon finish  
Warning flag  
1 Screw karabiner & 1 Automatic Scaff hook  
Security Clip

### Technical description

Elasticity : 30.0 %  
Length Folded : 1.05m

Integrated shock absorber  
Polyester fibers  
Impact strength reduction: > 500 daN

**External highly resistant webbing:**  
Polyamide webbing 45mm - green  
Teflon finish  
Breaking strength: > 2500 daN

**Screwgate karabiners ML00**  
Galvanized steel  
Standard: EN 362  
Opening: 18 mm  
Breaking strength: > 2200 daN

**Automatic snap hook ML04**  
Raw material: White chromate steel  
Standard: EN 362  
Opening : 63 mm  
Breaking strength: > 2000 daN

Weight : 0.920 Kg

Breaking strength: > 15 KN  
Temperature: -30°C to +50°C

### Additional information

TEFLON® is a registered trademark of DuPont for its brand of fabric protector.  
Only DuPont makes TEFLON®.

### Technical specifications and standard

European directive :  
89/686/CEE

Norms :  
EN355

EC type attestation :  
0082/490/160/04/01/0091

Quality Assurance  
AFAQ: ISO 9001 : Version 2000

Certification number :  
0333 AFAQ/CTH

Marking :  
MILLER



click address to go to....

# ME86 - MANYARD SHOCK ABSORBING LANYARD - 1.5M - ML00+ML04

[click address to go to....](#)

# ME86 - MANYARD SHOCK ABSORBING LANYARD - 1.5M - ML00+ML04

The supplier or its legal representative supplier settled in the European community :

**MILLER**

declares that the new Individual Protection Equipment described hereafter :

Designation :

**ME86 - Manyard Shock absorbing Lanyard - 1.5m - ML00+ML04**

Article code :

**10 053 24**

is in conformity with Directive dispositions 89/686/CEE.

This PPE has been the object of the EC attestation type :

**0082/490/160/04/01/0091**

delivered by :

**APAVE Lyonnaise  
177 route de Saint-Bel  
69811  
TASSIN CEDEX  
France**

Identified by the number :

**0082**

Made on the : **05/08/2004**

at : **Vierzon**

Division : **Fall Protection**

By : **Frederic GUICHARD**

[click address to go to....](#)





### Technical specifications and standard

**European directive :**  
89/686/CEE

**Norms :**  
EN355

**EC type attestation :**  
0082/490/160/04/01/0091

**Quality Assurance**  
AFAQ: ISO 9001 : Version 2000

**Certification number :**  
0333 AFAQ/CTH

**Marking :**  
MILLER



[click address to go to....](#)

# ME86 - MANYARD SHOCK ABSORBING LANYARD - 2M - ML00+ML04

## Product use

**2m Shock absorbing Lanyard - complete with 1 screwgate karabiner (ML00) & Automatic Snap hook, with TEFLON® finish**

Added elasticity 32%  
Integrated shock absorber  
Highly resistant external webbing, Teflon finish  
Warning flag  
1 Screw karabiner & 1 Automatic Scaff hook  
Security Clip

## Technical description

**Elasticity : 32.8 %**  
**Length Folded : 1.35m**

Integrated shock absorber  
Polyester fibers  
Impact strength reduction: > 500 daN

**External highly resistant webbing:**  
Polyamide webbing 45mm - green  
Teflon finish  
Breaking strength: > 2500 daN

**Screwgate karabiners ML00**  
Galvanized steel  
Standard: EN 362  
Opening: 18 mm  
Breaking strength: > 2200 daN

**Automatic snap hook ML04**  
Raw material: White chromate steel  
Standard: EN 362  
Opening : 63 mm  
Breaking strength: > 2000 daN

**Weight : 0.985 Kg**

Breaking strength: > 15 KN  
Temperature: -30°C to +50°C

## Additional information

TEFLON® is a registered trademark of DuPont for its brand of fabric protector.  
Only DuPont makes TEFLON®.

# ME86 - MANYARD SHOCK ABSORBING LANYARD - 2M - ML00+ML04

[click address to go to....](#)

# ME86 - MANYARD SHOCK ABSORBING LANYARD - 2M - ML00+ML04

The supplier or its legal representative supplier settled in the European community :

**MILLER**

declares that the new Individual Protection Equipment described hereafter :

Designation :

**ME86 - Manyard Shock absorbing Lanyard - 2m - ML00+ML04**

Article code :

**10 053 25**

is in conformity with Directive dispositions 89/686/CEE.

This PPE has been the object of the EC attestation type :

**0082/490/160/04/01/0091**

delivered by :

**APAVE Lyonnaise  
177 route de Saint-Bel  
69811  
TASSIN CEDEX  
France**

Identified by the number :

**0082**

Made on the : **05/08/2004**

at : **Vierzon**

Division : **Fall Protection**

By : **Frederic GUICHARD**

[click address to go to....](#)

# Shock-Absorbing Lanyard

## Technical Specifications

**Product:** ME86 - Miller™ Manyard™ Stretchable Shock-Absorbing Lanyard equipped with one karabiner and one scaffold hook

**Reference:**

| Reference | Length maxi | stretch | Length Folded | Weight   |
|-----------|-------------|---------|---------------|----------|
| 1005324   | 1.5 m       | 30.0 %  | 1,05 m        | 0,920 kg |
| 1005325   | 2.0 m       | 32.8 %  | 1,35 m        | 0,985 kg |

### Main Features

- Up to 32 % stretch*
- Special woven shock-absorbing inner core*
- Heavy-duty tubular outer jacket*
- Warning flag*
- Screw karabiner*
- Lanyards safety clip*

### Material

**Shock-absorbing inner core :**

Raw material: polyester fibber  
Impact force reduction : > 500 daN

**Heavy-duty tubular outer jacket :**

Raw material: Polyamide 6.6 webbing  
45mm – green colour  
Breaking strength: > 2500 daN

**Double Action Scaffold Hook:**

Raw material: White chromate steel  
Standard: EN 362  
Opening : 50 mm  
Breaking strength: > 2000 daN

**Karabiner:**

Raw material: Galvanised steel  
Standard: EN 362  
Opening: 18 mm  
Breaking strength: > 2200 daN

### Technical

Breaking strength: > 15 KN  
Temperature: -30°C to +50°C

### Standards

EN 355

